



Collection
2026

Wall protection & decoration Handrails

Spm[®]
wall protection



Discover our wall protection and decoration products.

From protective panels and handrails to signage and corner guards, SPM offers innovative, decorative and eco-friendly solutions to protect, enhance and preserve public infrastructure.



12 - 29

96

110

ABOUT US

For over 40 years, SPM, based in Toulouse, France, has specialised in wall protection and handrails, developing innovative, decorative and eco-responsible solutions to protect, enhance and maintain infrastructures open to the public, such as:

- Education;
- Healthcare;
- Housing;
- Hospitality;
- Sport;
- Industry;
- Shops;
- ...

MADE IN
FRANCE



WHY OPT FOR PROTECTION?



SUSTAINABLE RENOVATION

FIND OUT MORE ➤



REDUCED COSTS

FIND OUT MORE ➤



ENHANCE

FIND OUT MORE ➤



LONG-TERM RESISTANCE

FIND OUT MORE ➤



NO-FUSS INSTALLATION

FIND OUT MORE ➤



ADVANTAGES OF THE SPM SOLUTION

- Proven and certified resistance;
- Compliant with fire regulations Bs1d0 and Bs2d0;
- Specialist adhesives and accessories;
- 100% recyclable materials;
- Standard or made-to-measure systems.

Whatever the problem or the need of the establishment, many SPM solutions can be prescribed.

THE BENEFITS OF SPM SOLUTIONS



BS1D0 & BS2D0 REACTION TO FIRE

FIND OUT MORE >



RESISTANCE TO IMPACTS

FIND OUT MORE >



SCRATCH RESISTANCE

FIND OUT MORE >

GOOD TO KNOW!

SPM has developed a specific adhesive, MS POLYMER:

- Ideal for wet rooms;
- 0 tacking time during installation: **quick installation**;
- **Reduces wall panel expansion:** up to 4 times;
- Panel installation process **patented**



THE BENEFITS OF SPM SOLUTIONS



RESISTANCE TO STAINS

FIND OUT MORE ➤



100% ANTIBACTERIAL MATERIAL

FIND OUT MORE ➤

GOOD TO KNOW!



- The handrails are fitted with bactericidal joints.
- Option: bactericidal treatment available on request, on all colours in the DECOCHOC and DECOCLEAN ranges and on all handrails. Consult us.

Tests carried out on contamination from human flora (E.Coli) and environmental flora *Pseudomonas aeruginosa* according to test report no. 08112803 - NOSOCO.TECH laboratories

THE BENEFITS OF SPM SOLUTIONS



VIRUCIDAL ACTIVITY

FIND OUT MORE >



CONTRIBUTING TO AIRBORNE PARTICULATE CLEANLINESS

FIND OUT MORE >



NUCLEAR DECONTAMINATION

FIND OUT MORE >



THE BENEFITS OF SPM SOLUTIONS



FOOD CONTACT

[FIND OUT MORE >](#)



ATEC

[FIND OUT MORE >](#)



DSDC-CERTIFIED COLOURS

[FIND OUT MORE >](#)



PLUS POINTS MIX & MATCH WALL/ FLOOR!

SPM wall protection rails, panels, corner protections and handrails work perfectly with Gerflor vinyl floors and LVT tiles: a valuable asset for projects with a consistent and highly sustainable design.



A RANGE THAT RESPECTS THE ENVIRONMENT

SPM has always considered its customers and the environment as absolute priorities. Our aim is to offer products that are more environmentally friendly, by working on each step of the product's life cycle, from design to product, use and decommissioning:

WALL PROTECTION AS PART OF LOW-CARBON PROJECTS



EXEMPLARY CARBON FOOTPRINT

7.62 kg eq. CO₂/m²



SERVICE LIFE UP TO 25 YEARS

Our panels have a proven average service life of 25 years!



VERIFIED EPD

Environmental Product Declarations (EPD) are used to measure and compare environmental impacts (particularly the carbon footprint at each stage in the product's life).

They are produced by an independent laboratory. Available on request.



CERTIFIED PROJECTS — LEED? BREEAM? GREEN STAR?



**SPM supports your projects
— today and tomorrow.**

Much more than just wall protections.

At SPM, our teams are committed to a strong environmental approach every single day. We prioritise responsible sourcing, careful manufacturing, and products that meet strict standards — with a unique recycled content in our panels and exemplary service, both locally and internationally.

A RANGE THAT RESPECTS THE ENVIRONMENT



Decochoc panel has one of the **best carbon footprints on the market** for wall protection: 7.62 kg eq. CO₂/m².



Our products are easy to clean and consume **less water and detergent products**.



Our wall protection panels include on average **24% recycled material**.



Our panels have a proven average service life of **25 years**.



Our products **do not contain any of the heavy metals** such as lead, cadmium, arsenic, tin, PBT or BPA.



Our materials, mainly PVC and aluminium, are **100% recyclable**.



Our products **do not contain any substance** on the REACH restrictions list.



All production offcuts from SPM's workshops are reintegrated into future manufacturing. Sustainability, from start to finish!



SPM offers a **cutting service** that avoids unnecessary offcuts or cuts on site.



SPM products can be integrated into building projects that are part of a **High Environmental Quality approach** (LEED, BREEAM, etc.).



We recommend using **SPM solvent-free adhesives**. They present **no risk to the health of users or to the environment**.



Our products are tested in accordance with **ISO 16000-6** and have a level of less than 15 µg/m³ after 28 days, which is tiny compared to the required threshold.



Our panels have been approved by the Greenguard Gold label, for **their low emissions, guaranteeing excellent indoor air quality**.

24% OF RECYCLED MATERIAL

SPM innovation

Did you know?

SPM wall protection panels contain **24% recycled PVC on average**. And without any compromise:

- Bs2d0 reaction to fire;
- High performance;
- Resistance to impacts.

HOSPITALS - CLINICS - RETIREMENT HOMES AND DISABILITY CENTRES



MAGNIN CLINIC - NEW CALEDONIA
Decochoc panel/ Escort handrail/Cornea corner protectors
SANAE Architecture - Photographer Eric Dell'Erba



PAULE DE VIGUIER HOSPITAL - TOULOUSE - FRANCE
Decoprint panels/Contact plate/Impact wall protection rails
Architect Groupe Kardham/Artist Stéphanie Ledoux




AL NOOR HOSPITAL - ABU DHABI
LineaTouch LED handrail/Decochoc panel



CENTRE DE CANCEROLOGIE DE LA SARTHE - LE MANS - FRANCE
Impact wall protection rails



IAC INSTITUT AQUITAIN DU COEUR - FRANCE
Decochoc panels

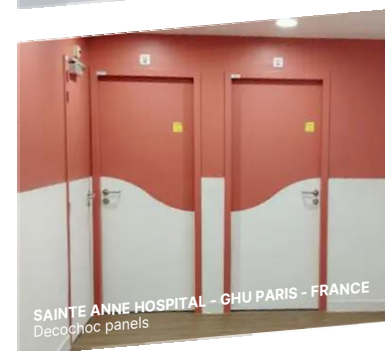


SAINTE ANNE HOSPITAL - GHU PARIS - FRANCE
Decochoc panels



Hospital design

SPM colours are certified by the DSDC.

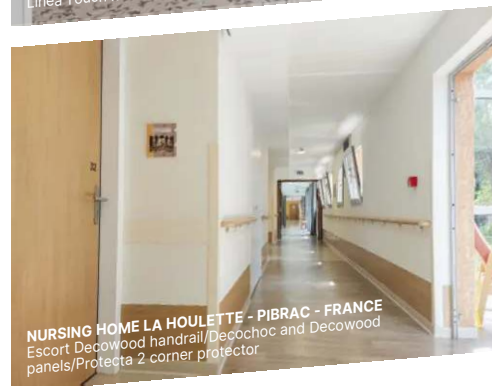

Worlds that leave nothing to chance

- Priority for hygiene.
- Resistance to impacts.
- Healthy, welcoming environment.
- Easy maintenance.
- Simple installation.
- Controlled budget.

HOUSING	Hospitalisation, current floor
	Inpatient rooms (including toilets), current room type
OTHER	Treatment preparation room, nursery, staff station
	Patient lounge, relaxation room
	Service rooms (linen and equipment storage)
MEDICAL- TECHNICAL PLATFORM: EMERGENCY DEPARTMENT	Traffic
	Reception, waiting room
	Examination and treatment room
OPERATING THEATRE OR INTENSIVE CARE UNIT	Traffic
	Operating theatre
	Recovery room
LABORATORY/STERILISATION	Laboratory
	Central sterilisation and packaging
DAY HOSPITAL, CONSULTATION, FUNCTIONAL REHABILITATION, CENTRAL PHARMACY, MORTUARY	Waiting room and traffic
	Outpatient consultation and examination room
	Storage of clean linen and equipment, pharmacy storage room
	Physiotherapy and occupational therapy room
ADMINISTRATION, GENERAL AND COMMON SERVICES	Staff canteen, cafeteria
	Laundry, linen storage room
	Toilets, changing rooms
	Laundry, community kitchen and annexes
RECEPTION AND TRAFFIC	Hall and lift landing
	Stairs
LOGISTICS ZONES AND CAR PARKS	Traffic
	Storage
	Car park

[illegible]

CORNER PROTECTION							
Profile	Decowood - Decotrend bent corner protector (for continuities)	Protecta 2	LinearFlex	Profilinox	ComboCorner	Cornea	Corneaflex
							
							
							
							

HANDRAILS						
						LineaTouch+ - PVC sheathed
						LineaTouch - PVC sheathed
						LineaTouch LED - PVC sheathed
						LineaTouch - Decowood
						LineaTouch LED- Decowood
						LineaTouch - Anodised
						LineaTouch LED - Anodised
						Escort - PVC sheathed
						Escort - Decowood
						Escort - Anodised
						Starline - PVC sheathed
						Starline - Anodised
						Performer 2
						EscortDuo
						LineaDuo
						LineaDuo LED



RETIREMENT HOMES - DISABILITY-ADAPTED FACILITIES

Worlds where quality of life is an issue for residents

Your concerns

- Comfort.
- Ergonomics.
- Living environment.
- Wall protection & decoration.


TRAFFIC	Moderate traffic
	Lift
	Lift landing
HOUSING AND ROOM SERVICE	Room
	Shower room
	Communal toilets
SHARED PREMISES	Residents' dining room, entertainment rooms
	Relaxation and entertainment room
CONSULTATION AND TREATMENT ROOMS	Infirmery
	Consultation room
	Physiotherapy, occupational therapy and functional rehabilitation room
TECHNICAL ROOMS	Storage of products (care products, nappies) and equipment
	Laundry, linen storage room
	Central kitchen and ancillary rooms
LOGISTICS ZONES AND CAR PARKS	Traffic
	Storage
	Car park

WALL PROTECTION															
Decochoc (side-by-side, silicone joint)	Decochoc (thermo-welded)	Decoclean	Decowood/Decotrend - Panels	Decofresc - Decorative frescoes	Decoprint	Decochoc Staro	Decosign - Customised signage	Contact 350	Contact 200	Linea/Bedkit	Linea/Punch Neo	Impact 200	Impact 120	Impact 60	Punch/Inox
●		●		○	○	●	●	●		●	●	○			
●				○	○	●				●	●	●	○		
●				○	○	○				●	●	●	○		
●		●		●	○	○	●	○	○		●	●			
●				○	○	●									●
●		●	●	○	○	●	●	○		●	●	●			●
●		○		○	○	●		●				●	○		
●	○	○	○	○	○	●	○		●						○
●				○	○	○				●	●				○
●					○	●				●	●	●		○	●
						●									●
						●									●
						○				●	●	●		○	●

DOOR PROTECTION									
Full-height door (2-sided)									
Half-height door	●	○							
Foot-height door		○							
Half-height decorative door	●								
Bends, edges and frames	●								
Handplates									
Half-height door - Inaid signage									

CORNER PROTECTION									
Profilia	○	○							
Decowood - Decotrend bent corner protector (for continuities)			●	●					
Protecta 2									
LineaFlex				○					
Profilinox									
ComboCorner				●					
Cornea				●					
Corneaflex					●				
ElastoFlex 100V									

HANDRAILS									
LineaTouch+ - PVC sheathed	●	●	○		●	○			
LineaTouch - PVC sheathed		●							
LineaTouch LED - PVC sheathed			○			●			
LineaTouch - Decowood									
LineaTouch LED - Decowood									
LineaTouch - Anodised									
LineaTouch LED - Anodised									
Escort - PVC sheathed									
Escort - Decowood									
Escort - Anodised									
Starline - PVC sheathed									
Starline - Anodised									
Performer 2									
EscortDuo									
LineaDuo									
LineaDuo LED									

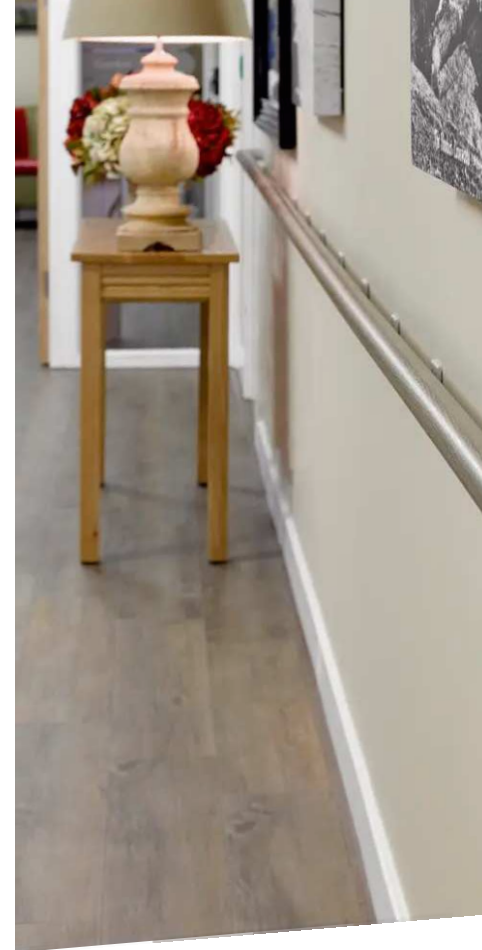

● SPM recommendation

○ Another possible solution

EDUCATION



FAHRENKROEN KINDERGARTEN - GERMANY
Decochoc panels




Escort handrail with Rapid Angle®



Decoprint-panels



Decochoc panels

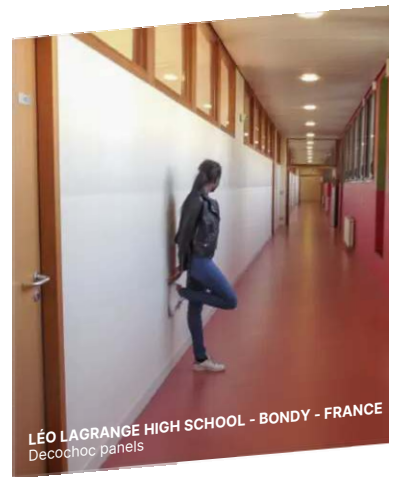

LÉO LAGRANGE HIGH SCHOOL - BONDY - FRANCE
Decochoc panels



Kidfresc panels



ORT GIVAT RAM SCHOOL - ISRAEL
Decochoc panels



AMPÈRE HIGH SCHOOL - MORSANG-SUR-ORGE - FRANCE
Decochoc panels



PIAN MÉDOC SCHOOL - FRANCE
Decowood panels



PRIORY RUSKIN ACADEMY
Decochoc panels



ANKORI SCHOOL - ISRAEL
Contact plate

Worlds where wall protection and pupil well-being must go hand in hand

- Intensive passage.
- Easy maintenance.
- Style.

NURSERY SCHOOLS AND NURSERIES	Traffic
	Entrance hall, reception and relaxation
	Classroom
	Stairs
	Activity and exercise room
PRIMARY SCHOOLS	Traffic
	Entrance hall, reception and relaxation
	Classroom
	Stairs
	Activity and exercise room
MIDDLE SCHOOL	Traffic
	Entrance hall, reception and relaxation
	Stairs
	Classroom
	Physical education room
	Computer and science room, laboratories
HIGH SCHOOL	Traffic
	Stairs
	Classroom
	Computer and office equipment room
	Laboratory
	Housing (including student residences)
EDUCATION-RELATED AREAS	Canteen, multi-purpose dining room
	Toilet blocks
	Kitchen and annexes
	Traffic in technical areas
	Sick bay, medical facilities
	Archives, filing rooms

WALL PROTECTION									
Decochoc (side-by-side, silicone joint)									
Decochoc (thermo-welded)									
Decoclean									
Decowood/Decotrend - Panels									
Decofresc - Decorative frescoes									
Decoprint									
Decochoc Staro									
Decosign - Customised signage									
Contact 350									
Contact 200									
KIDFRESC									
LineaPunch Neo									
Impact 200									
Impact 120									
Impact 60									
PunchInox									
PlacInox									
ElastoPunch 200E									
ElastoPunch 100D									


CORNER PROTECTION							
Profilra	☐	☐	☒	☒	☐	☐	☐
Decotrend - Decotrend bent corner protector (for continuities)	☒	☒	☒	☒	☐	☐	☐
Protecta 2	☐	☐	☒	☒	☐	☐	☐
LineaFlex	☐	☐	☒	☒	☐	☐	☐
ProfiliInox	☐	☐	☐	☐	☐	☐	☐
ComboCorner	☐	☐	☐	☐	☐	☐	☐
Cornea	☐	☐	☐	☐	☐	☐	☐
Corneaflex	☐	☐	☐	☐	☐	☐	☐
ElastoFlex 100V	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☒	☒	☒	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐	☐	☐
☐	☐	☐	☒	☒	☐		


HANDRAILS					
LineaTouch+ - PVC sheathed					
LineaTouch - PVC sheathed					
LineaTouch LED - PVC sheathed		●			
LineaTouch - Decowood					
LineaTouch LED- Decowood		●			
LineaTouch - Anodised					
LineaTouch LED - Anodised					
Escort - PVC sheathed				●	
Escort - Decowood				●	
Escort - Anodised					
Starline - PVC sheathed					
Starline - Anodised					
Performer 2					
Escort'Duo					
Linea'Duo					
Linea'Duo LED					



☐ Another possible solution

**OFFICES - HOTELS - RESTAURANTS
HOUSING**

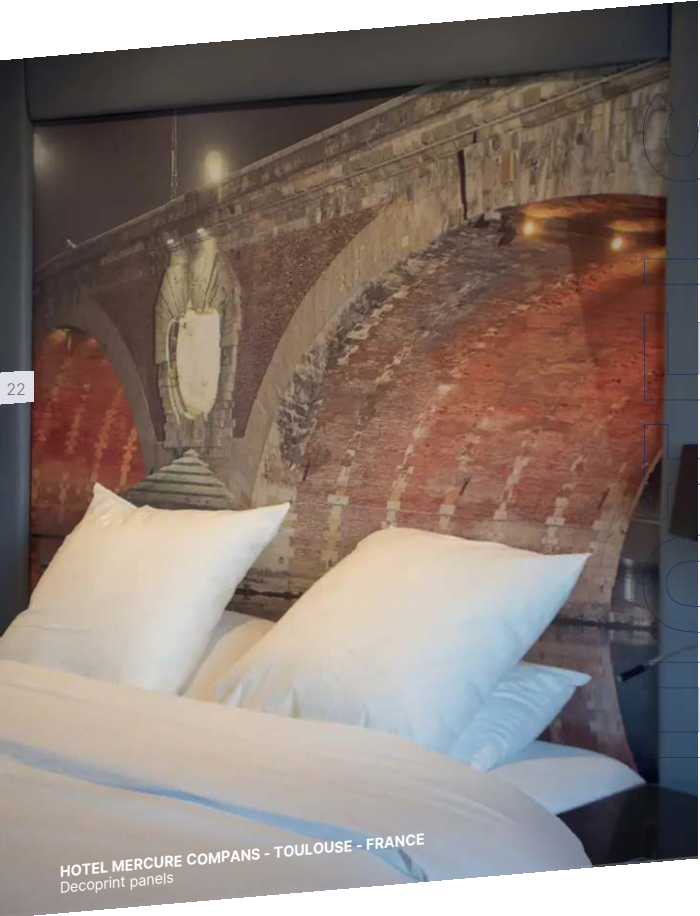

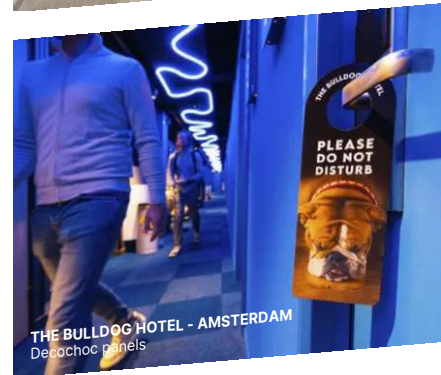

OFFICES - HOTELS - RESTAURANTS - HOUSING

Worlds where daily life needs to be made easier and more attractive

Your concerns

- Effective protection for walls and doors.
- Beautifully decorated.
- Renovation on a budget.
- Tile covering.
- Installation, even in an occupied environment.
- Easy to clean.


BUSINESS PREMISES	Office
	Meeting room, waiting room
ANCILLARY AND TECHNICAL ROOMS	Archives, filing rooms
	Toilet blocks
	Company restaurant, cafeteria
	Collective kitchen and annexes
	Traffic in technical areas
HOTEL PREMISES	Traffic in public access areas
	Traffic in technical areas
	Entrance hall, reception area
	Stairs
	Waiting room, meeting room
	Restaurant
	Room
	Toilet blocks
	Collective kitchen and annexes
	Car park
Housing	Entrance hall
	Traffic
	Staircases and stairwells
	Lift
	Bin room
	Bathroom and toilet blocks
	Kitchen
	Car park

WALL PROTECTION																																					
Decochoc (side-by-side, silicone joint)		Decochoc (thermo-welded)		Decoclean		Decowood/Decotrend - Panels		Decofresc - Decorative frescoes		Decoprint		Decochoc Staro		Decosign - Customised signage		Contact 350		Contact 200		Linea'Bedkit		Linea'Punch Neo		Impact 200		Impact 120		Impact 60		Punch'Inox		Plac'Inox		Elasto'Punch 200E		Elasto'Punch 100D	
●	●					●		●		●		○		●																							
●	●							●		○		●			●			●																			
	○									○		○		●	●		●															○					
●	●					●		○		○		○		●	●		○															○					
●	●							○		○		○		●	●		●														○						
●	●					●		○		○		○		●	●		●															○					
●	●					●		○		○		○		●	●		●															○					
●	●					●		○		○		○		●	●		●															○					
●	●					●		○		○		○		●	●		●															○					
●	●					●		○		○		○		●	●		●															○					
●	●					●		○		○		○		●	●		●															○					
●	●					●		○		○		○		●	●		●															○					
○	○					○								○	○																						
○	○					○								○	○																						
●	●					●		○		○		○		●	●																						
●	●					●		○		○		○		●	●																						
●	●					●		○		○		○		●	●																						
●	●					●		○		○		○		●	●																						
●	●					●		○		○		○		●	●																						
○	○					○								○	○																						
○	○					○								○	○																						

DOOR PROTECTION									
Full-height door (2-sided)									
Half-height door									
Foot-height door			●						
Half-height decorative door				●					
Bends, edges and frames					●				
Handplates								○	
Half-height door - inlaid signage									○

CORNER PROTECTION									
Profilia									
Decowood - Decotrend bent corner protector (for continuities)	○	●							
Protecta 2			○						
Linea'Flex				○					
Profilinox					●				
Combo'Corner									
Cornea									
Corneaflex									
Elasto'Flex 100V									

HANDRAILS									
Linea'Touch+ - PVC sheathed									
Linea'Touch - PVC sheathed									
Linea'Touch LED - PVC sheathed									
Linea'Touch - Decowood									
Linea'Touch LED - Decowood									
Linea'Touch - Anodised									
Linea'Touch LED - Anodised									
Escort - PVC sheathed									
Escort - Decowood									
Escort - Anodised									
Starline - PVC sheathed									
Starline - Anodised									
Performer 2									
Escort'Duo									
Linea'Duo									
Linea'Duo LED									

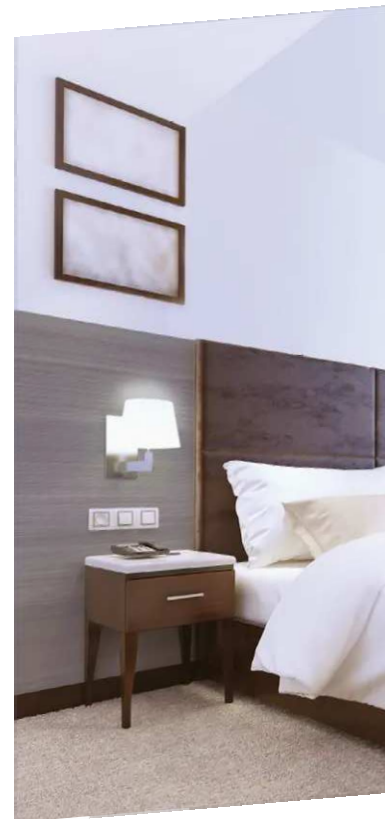


● SPM recommendation

○ Another possible solution

SHOPS - SPORT - INDUSTRY



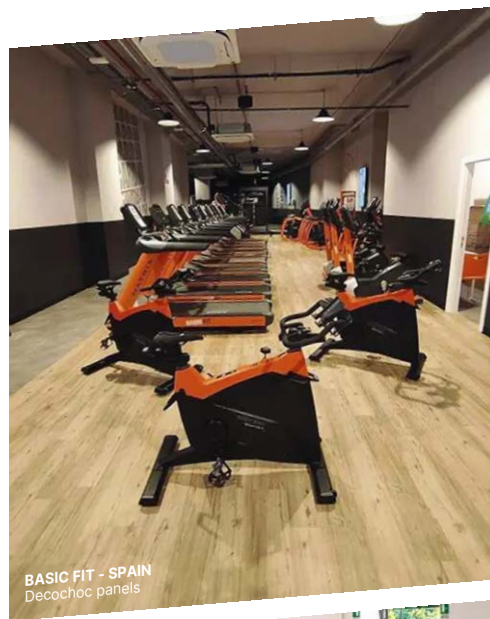


Worlds that rhyme with intensity and efficiency

- Effective wall protection.
- Waterproofing for wet areas.
- Certified solutions for contamination control.

	CUSTOMER AREAS	Reception counter/Cash desk
		Sales area
		Fitting room
		Corridor
		Pillars
		Stairs
	AREAS RESERVED FOR STAFF	Changing room
		Relaxation areas
	ANCILLARY PREMISES Shops	Toilet blocks
		Storage room
Storage		
Unloading dock		
HIGH-TRAFFIC AREAS	Traffic	
	Stairs	
SPORTS AREAS	Gymnasium	
	Fitness and weights room	
RELATED AREAS Sport	Cafeteria, bar	
	Changing room	
	Showers and toilets	
LIFE SCIENCES	Laboratory, clean room, airlock	
	Storage, laundry	
HIGH INDUSTRIAL TRAFFIC (for non-motorised trolley area)	Traffic	
	Packaging	
	Production	
	Storage	
HIGH INDUSTRIAL TRAFFIC (for motorised trolley area)	Traffic/Storage/Docks	

[illegible]

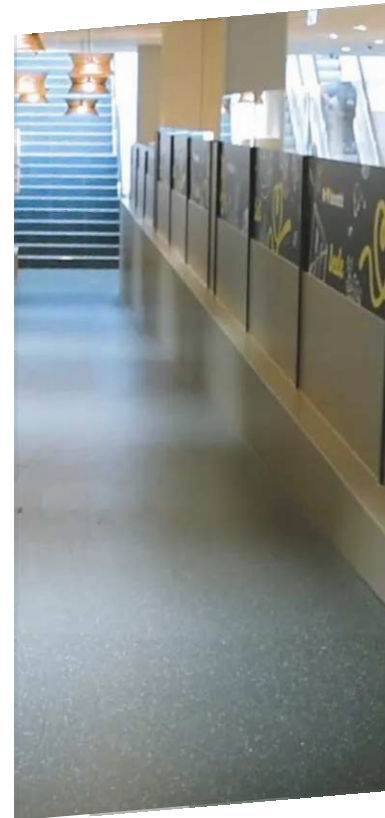


☐ Another possible solution

PALETTE OF 50 COLOURS

A palette of 50 colours designed in collaboration with architects, interior designers, colourists and end-users.

SOLID COLOURS: Do as you please!


The 39 matt and solid colours, from the most sober to the most daring, blend in with the designer's initial concept or, conversely, play with colours and contrasts to give a new identity to spaces.

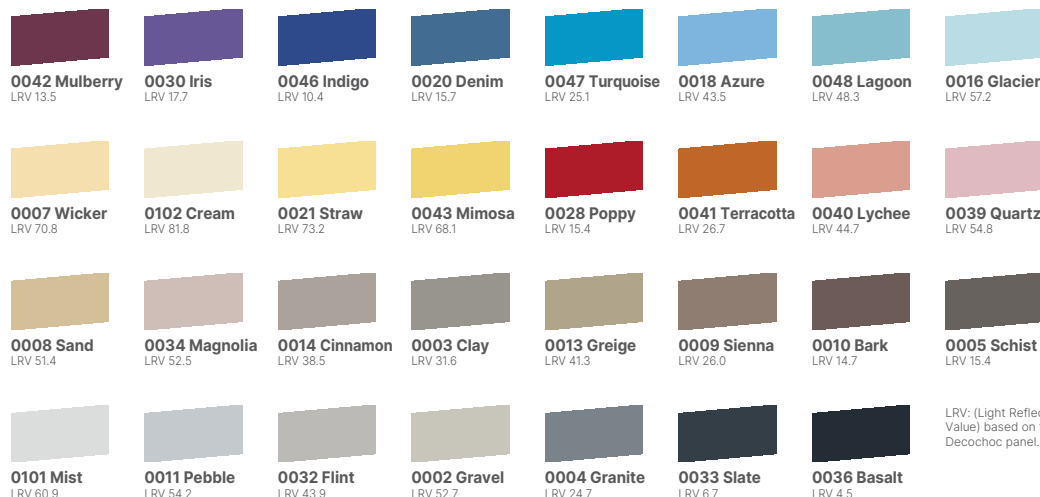

LRV: (Light Reflectance Value) based on the Decochoc panel.


WOOD: Create a cosy atmosphere!

The 7 wood decors can be used for both wall protection and handrails, offering users and staff a welcoming atmosphere thanks to the warmth of wood.

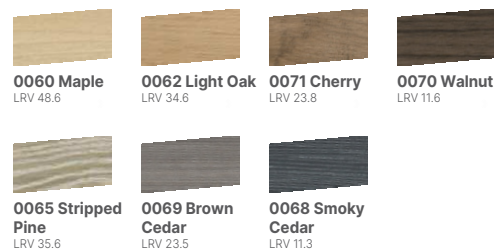

TRENDS: Break the codes!

The 4 trendy decors have a modern, urban feel thanks to surprising material effects: brushed aluminium, raw concrete and oxidised steel.

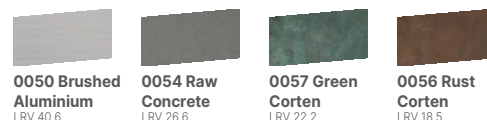

PLUS POINT

In order to offer the best possible contrasts required in certain environments, SPM colours are DSDC (Dementia Services Design Center) certified - see table on page 110 - and comply with the Accessibility standard.



AT THE SERVICE OF OUR CUSTOMERS

SPM is much more than just wall protection.

A team fully dedicated to your projects, a nationwide network for optimum proximity, and solutions to almost all of your problems!



At the service of our customers

95% of our references are available in under 15 days (excludes international transport and special projects. Consult us)



Free quotes

Looking for a price quote? Looking for a technical solution tailored to your project? Need help with a call for tenders? You'll receive a timely response from our team.



Local contacts


Our Export sales team is always close to you and your projects, providing assistance with measurements, on-site advice, dialogue with the various parties involved in the project, etc.



Technical recommendations

Because wall protection needs differ from one project to the next, SPM systems can be adapted to meet all your requirements.

1 - Protect the entire impact area

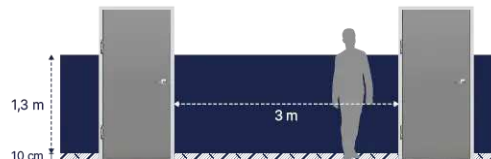

CONTACT US FOR MORE INFORMATION!




For the rest, our teams will do their utmost to find the solution best suited to your needs!



Quick installation

Protect your walls in no time at all with our standard sized panels:
L. 3 m x H. 1.30 m

2 - Choose your protection height

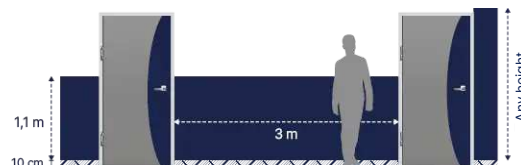

Opt for made-to-measure panels and only pay for what you actually need.



Custom-made for peace of mind

0 offcuts and optimum protection for walls and doors.

3 - Protect, optimise & support



Manage and reuse your offcuts by cutting standard panels at mid-height. 80% of the wall's surface is protected against impacts and tearing.



Accessibility

Add a handrail to ensure 100% protection of the area of the wall exposed to impacts and to ensure user safety and guidance.

PRODUCT PAGES: GUIDE

To respond to all your projects and issues, we've created simple, visual product pages that summarise all the information you need.

Type of use

Product range and name

Product presentation

Establishments and areas of application

Technical SPECIFICATIONS

At a glance, you can access all the product characteristics in the form of a summary table: dimensions, certificates, environmental data, etc.

How to install the SPM product

Colour offering

See the range of colours available for each product at a glance.

- On the left: Standard colours, in stock.
- Right: colours available to order (minimum quantity and lead time), please contact us.

WALL PROTECTION

WALL PROTECTION RAILS

LINEA'PUNCH NEO

The Linea'Punch Neo wall protection rail is the ideal combination of impact resistance and design.

Designed to blend in with the décor, it is the perfect match for Linea'Touch handrails.

Its narrow, bevelled end pieces minimise the space required and the distance to door frames.

It guarantees easy cleaning and optimum hygiene.

Quick and easy to fit, its double clipping system ensures perfect application. Very strong wall protection.


HOSPITALS **CLINICS** **LABORATORIES** **WHITE ROOMS**
RETIREMENT HOMES **BACK AREAS (HOTEL, RESTAURANT)**

Height(s)	180 mm
Length(s)	4 m Customisation
Overall dimensions	25 mm
Material(s)	PVC
Hygiene	Antibacterial
Fire	M1/Bs2d0
Colours	39 Through coloured
Surface appearance	Matt with central boss

Mounting
 On aluminium clip.
 Option: On continuous aluminium rail.

Installation mode
 The middle section of the profile is 0.80 m above the floor for mid-wall protection or above the skirting board for bottom section protection. Mounted by clipping onto "4-point" aluminium clips every 0.75 m maximum or, as an option, on a continuous aluminium rail.

Standard colours

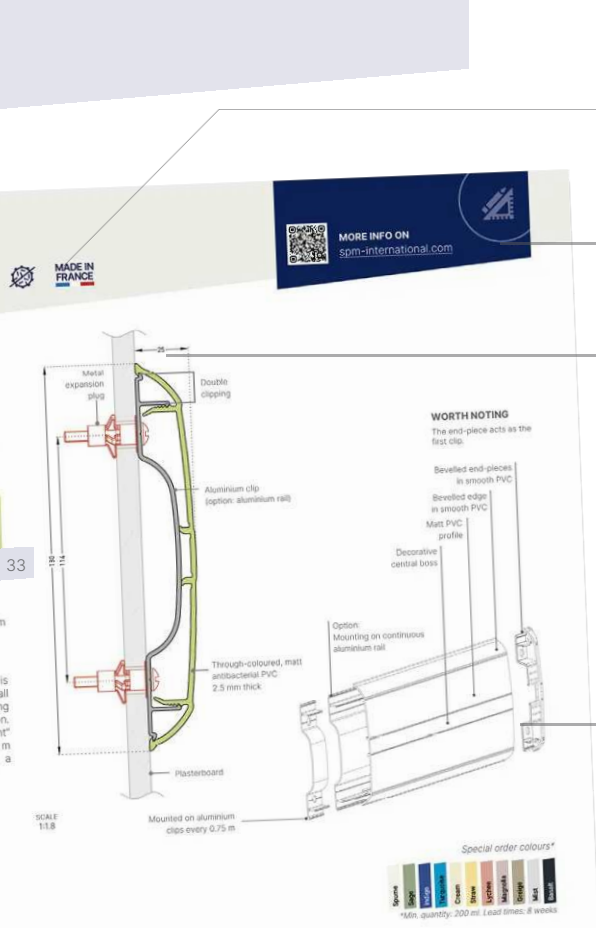

Certifications, resistance and properties

Discover the benefits of each product, illustrated by pictograms.

Is there any missing information?

Scan the QR codes to access the dedicated web page: documents, descriptions, product components, etc.

Technical cross-section

Get a clear view of the dimensions, overall dimensions, strengths and special features of each product, including fixing systems.

Exploded view

See all the product components and available options.

ANY QUESTIONS OR NEED ADVICE?

ASSISTANCE > + 33 (0) 5 34 39 41 00

export@spm.fr

CODIFYING PROTECTION NEEDS

A PICTOGRAM FOR EACH USE

Within the same establishment, the "protection" response depends on the impact zones, the intensity of the traffic and the rolling equipment.

We have established a classification of uses and assigned them two pictograms, each with three levels of intensity, to guide you through our documentation.

Intensity of passenger traffic:
very busy or low-traffic reception area



Heavy traffic



Moderate traffic



Light traffic

Impact intensity:
trolleys, rolling equipment, suitcases, etc.



Regular and strong shocks



Shocks and impacts at normal speed




Rare and low-intensity shocks

PRACTICAL INTERNET & BIMOBJECT

All our technical information (type descriptions, cross-sections and installation advice) is available & can be downloaded from our website: spm-international.com

Most of our products are available on BIMObject.

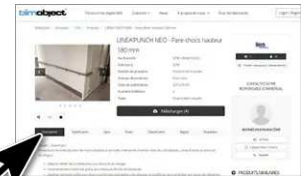

INSTALLATION ADVICE

To help you install our products, the installation guide is available on request or on our Youtube channel.

VIDEO

Installing the panels

WATCH VIDEO

VIDEO

Installing handrails

WATCH VIDEO





WALL PROTECTION

All Establishments open to the public face the same problems: premature wear and tear on their premises.

To provide you with the appropriate solution, SPM has developed and tested solutions based on three product families:

- protection and covering panels,
- protection plates,
- wall protection rails.

All are resistant to impact, germs and aggressive cleaning agents.



Because our products designed with through-coloured antibacterial PVC, neither maintenance nor the passage of time will alter the original colour.



GOOD TO KNOW!

SAFE/COVER: system for asbestos-contaminated areas (page 47).

Problem regarding wet rooms? SPM has the solution (page 46).



CONTENTS



DECOCHOC	36	AAA	BB
DECOCLEAN	37	A	BB
DECOWOOD	38	AAA	BB
DECOTREND	39	AAA	BB
DECOCHOC STARO	40	AAA	BB
DECOFRESC	41	AAA	BB

DECOSIGN	44
----------	----



WET ROOMS	46
SAFE COVER	47
DECOBOWL	47

TOOLS & FIXINGS 68

Find all our tools and fixing systems for panels and doors

DISCOVER



KIDFRESC	42	AA	BB
DECOPRINT	43	AA	BB

FIN'ALU	48
FIN'COLOR	49
FIN'STOP	50
FIN'CERAM	51
FIN'ANGLE	52
FIN'LINE	53



CONTACT	54	AA	BB
---------	----	----	----

LINEA'BEDKIT	55	A	BB
--------------	----	---	----



LINEA'PUNCH NEO	56	AAA	BB
IMPACT	57	AAA	BB
PUNCH'INOX	58	A	BB
PLAC'INOX	58	AA	BB
ELASTO'PUNCH 200E	59	A	BB
ELASTO'PUNCH 100D	59	A	BB

AAA Traffic intensity
BB Resistance to impacts

PROTECTION AND COVERING PANEL

DECOCHOC



SPECIFICATIONS

BIM OBJECT

The SPM bestseller!
DECOCHOC panels provide effective protection for large surfaces.
Its matt grained finish is discreet, resistant to chemicals and easy to clean.
It can be thermoformed to fit round pillars (up to Ø 800 mm) and guarantees optimum hygiene in corners.



HOSPITALS CLINICS RETIREMENT HOMES HOTELS

SCHOOLS EARLY CHILDHOOD RESTAURANTS

MULTI-FAMILY HOUSING GYMNASIUMS AND SPORTS HALLS

DISABILITY CENTRES SHOPS





Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO ₂ /m ²
Recycled content	24%
Average service life	25 years
Colours	39 Through-coloured
Surface appearance	Lightly textured with matt finish ("HydrX" finish)

Fixing
With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

Installation mode
Bonding in accordance with SPECIFICATIONS (substrate, adhesive and application context allowing Bs2d0 level).

Customised option(s)
Cutting, L or U folding, thermoforming, chamfering, bactericidal treatment.

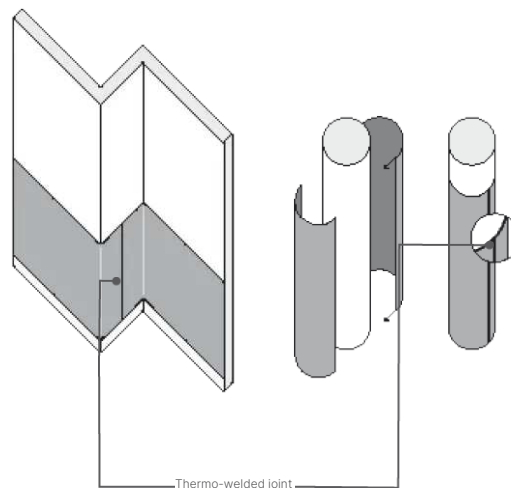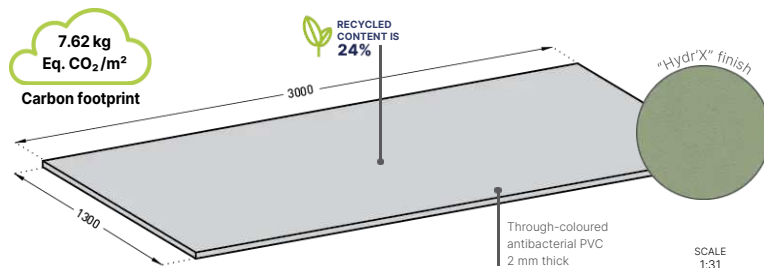

VIDEO
DECOCHOC
Panel installation:

WATCH VIDEO

NOTE

Joints between panels can be made with a thermo-welded joint or with a silicone joint in a colour to match the range (e.g. page 69).

Standard colours



E-brochures. By segment.
Click to discover.

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL

+

*See page 8: Benefits

DECOCLEAN



ISO 5



SPECIFICATIONS

BIM OBJECT

The DECOCLEAN panel protects high-risk infection areas, including level 4 zones, white rooms and industrial areas.

It limits nosocomial illnesses and bacterial proliferation.

It can be thermoformed to fit round pillars ($\varnothing < 800$ mm) and ensures perfect hygiene in corners.



OPERATING THEATRES | TRANSPLANT ROOMS | WHITE ROOMS

BURNS UNITS | NEONATAL WARDS | STERILE AREAS

FOOD INDUSTRY | PRODUCTION AREAS

Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal* ISO Class 5*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO ₂ /m ²
Average service life	25 years
Colours	5 Through-coloured
Surface appearance	Smooth

Fixing

With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).



Installation mode

By SPM gluing as per SPECIFICATIONS.

Customised option(s)

Cutting, L or U folding, thermoforming, chamfering, bactericidal treatment.

7.62 kg
Eq. CO₂/m²
Carbon footprint

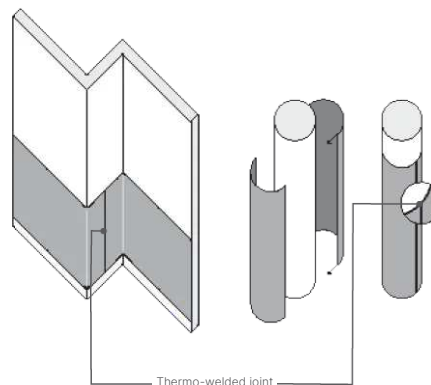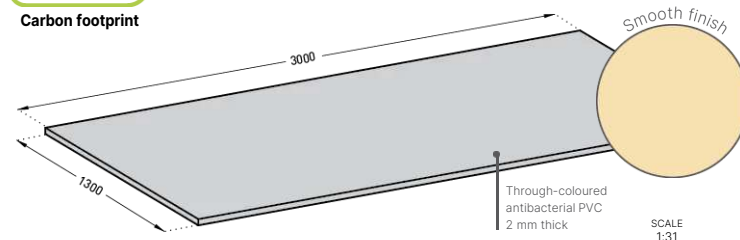

VIDEO


DECOCLEAN
Panel installation:

WATCH VIDEO

NOTE

Joints between panels can be made with a thermo-welded joint or with a silicone joint in a colour to match the range.

Standard colours



E-brochures. By segment.
Click to discover.

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL



*See page 8: Benefits

PROTECTION AND COVERING PANEL

DECOWOOD



SPECIFICATIONS

[BIM OBJECT](#)

DECOWOOD decorative protection and cladding panels are particularly suitable for protecting against impacts, scratches and rubbing in establishments that want to combine the protection and warmth of wood decor.

A textured finish and an ultra-realistic feel.

It can be thermoformed to cover round pillars (diameter up to 800 mm) and ensure perfect hygiene in corners.



HEALTHCARE FACILITIES RETIREMENT HOMES HOTELS
SCHOOLS MULTI-FAMILY HOUSING
SHOPS GYMNASIUMS AND SPORTS HALLS

Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Fire rating	Bs2d0
Carbon footprint	7.62 kg eq. CO ₂ /m ²
Recycled content	24%
Average service life	25 years
Colours	7
Surface appearance	Textured wood decor finish

Fixing

With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

Installation mode



By gluing as per SPM SPECIFICATIONS.

Customised option(s)

Cutting, L or U folding, thermoforming, chamfering.

THAT LITTLE EXTRA

A matching corner protection is also available in the DECOWOOD finish, as from folding panels, for perfect harmony with the wall's panels. Contact us.

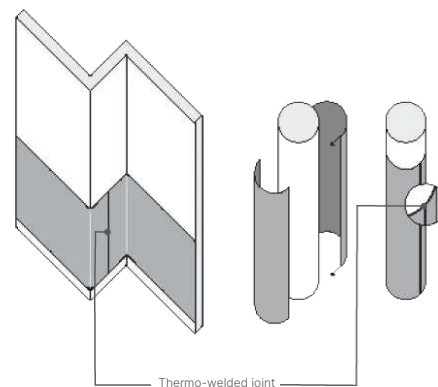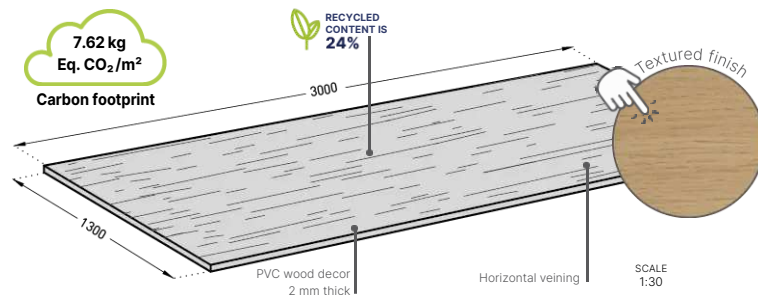

VIDEO

DECOWOOD panel installation

[WATCH VIDEO](#)

NOTE

Joints between panels can be made with a thermo-welded joint or with a silicone joint in a colour to match the range.

Standard colours



E-brochures. By segment.
Click to discover.

[HEALTHCARE](#)
[EDUCATION](#)
[HOSPITALITY](#)
[RETAIL](#)


PROTECTION AND COVERING PANEL

DECOTREND



SPECIFICATIONS

BIM OBJECT

The DECOTREND decorative protection and covering panel enhances and accentuates interiors in an original way and reflects a modern, urban design.

The panels can be thermoformed to cover round pillars (diameter up to 800 mm) and ensure perfect hygiene in corners.



HOTELS RETIREMENT HOMES MULTI-FAMILY HOUSING
SCHOOLS SHOPS GYMNASIUMS AND SPORTS HALLS

Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Fire rating	Bs2d0
Carbon footprint	7.62 kg eq. CO ₂ /m ²
Recycled content	24%
Average service life	25 years
Colours	4
Surface appearance	Metal or concrete decor finish, textured

Fixing

With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

Installation mode



By gluing as per SPM SPECIFICATIONS.

Customised option(s)

Cutting, L or U folding, thermoforming, chamfering.

THAT LITTLE EXTRA

A matching corner protection is also available in the DECOTREND finish, as from folding panels, for perfect harmony with the wall's panels. Contact us.

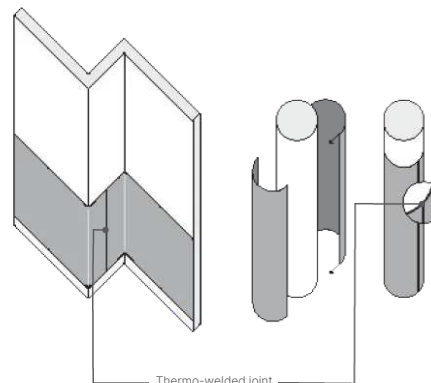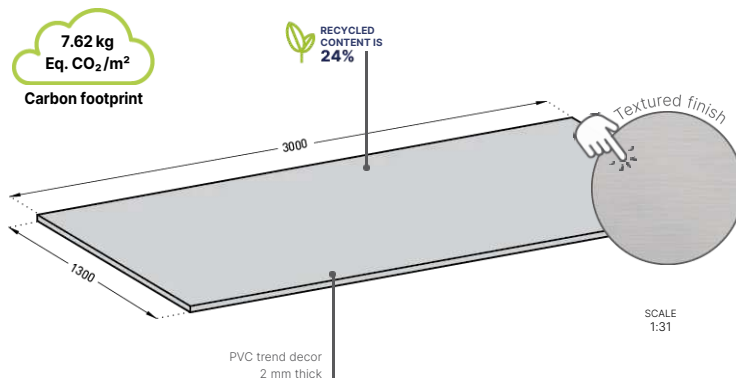

VIDEO

DECOTREND
panel installation

WATCH VIDEO

NOTE

Joints between panels can be made with a thermo-welded joint or with a silicone joint in a colour to match the range.

Standard colours



E-brochures. By segment.
Click to discover.

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL

+

DECOCHOC STARO



DECOCHOCStaro PVC-free wall protection and covering panel provides effective protection for large surfaces.

Its subtly textured finish is discreet, highly resistant to impact and scratches and exceptionally easy to clean. It can be thermoformed to fit round pillars (up to Ø 800 mm) and guarantees optimum hygiene in corners.

Designed to meet the most stringent fire and hygiene standards in public buildings, the DECOCHOCStaro system is the ideal solution for healthy interiors built to last—without the need for frequent renovations.



HOSPITALS CLINICS RETIREMENT HOMES
SCHOOLS HOTELS SHOPS


Height(s)	1.25 m
Length(s)	3 m
Thickness	1.5 mm
Material(s)	PETg Starolène
Fire rating	Bs1d0
Carbon footprint	9.58 kg* eq. CO ₂ /m ²
Average service life	25 years
Colours	11 Through-coloured
Surface appearance	Lightly textured with matt finish ("HydrX" finish)

Standard colours



*According to a product life cycle assessment - landfill scenario.

**Bs1d0 fire rating achieved with SPM MS Polymer adhesive. Certificate available on request. Please contact us.

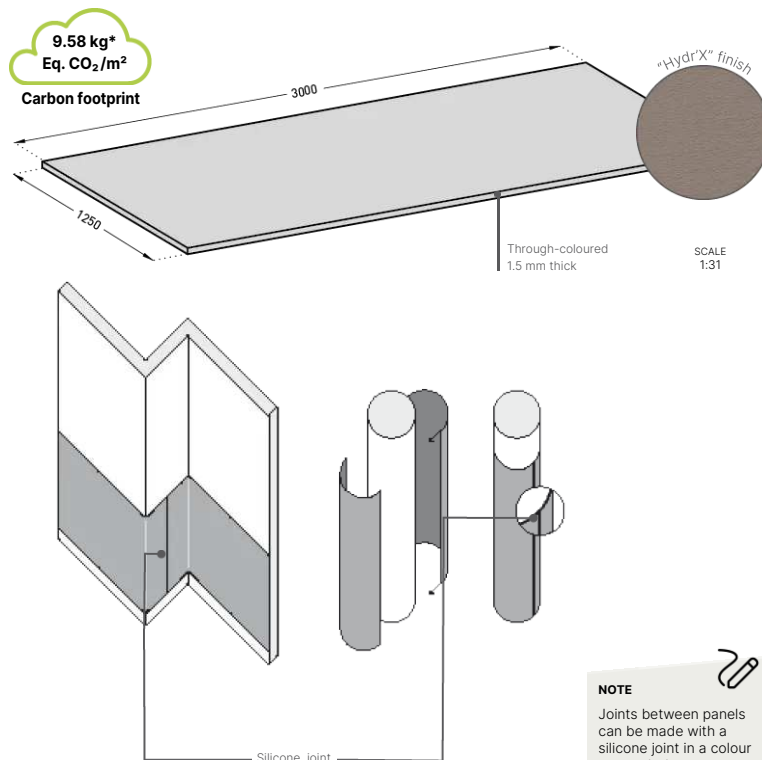

NOTE

Joints between panels can be made with a silicone joint in a colour to match the range.

PROTECTION AND COVERING FRESCO DECOFRES




SPECIFICATIONS



BIM OBJECT

DECOFRES adds a touch of elegance and customisation.
It provides a welcoming environment for establishments open to the public, while meeting hygiene and impact resistance requirements.

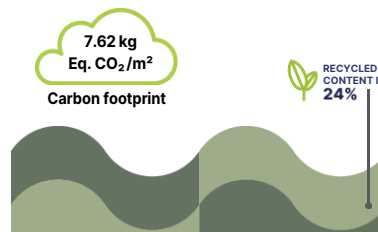

Wave



Cloud

HEALTHCARE FACILITIES HOTELS RESTAURANTS

SCHOOLS EARLY CHILDHOOD

Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO ₂ /m ²
Recycled content	24%
Average service life	25 years
Colours	39 Through-coloured
Surface appearance	Lightly textured with matt finish ("HydrX" finish)

Fixing


With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

Installation mode

By gluing as per SPM SPECIFICATIONS.

NOTE

Joints between panels can be made with a thermo-welded joint or with a silicone joint in a colour to match the range.

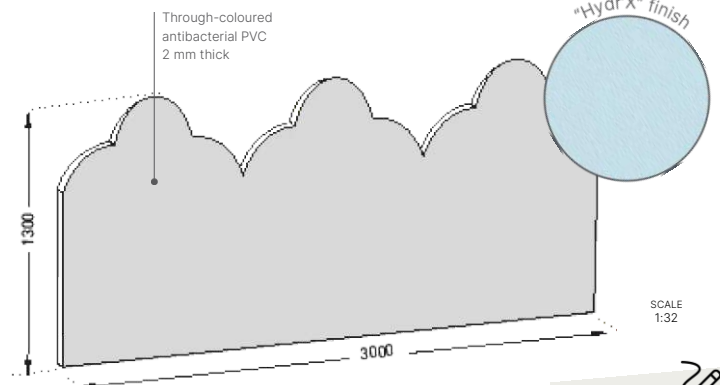SCALE
1:32

NOTE

These frescoes are made from cut DECOCHOC panels.

Standard colours



E-brochures. By segment.
Click to discover.



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



*See page 8: Benefits

DIGITAL PRINT PANELS

KIDFRESH



SPECIFICATIONS



BIM OBJECT

KIDFRESH's decorative frescoes for young children are specially designed to brighten up and protect walls. They create a cheerful, welcoming environment that stimulates children's imagination.

They meet the hygiene and impact resistance requirements of early childhood.



MATERNITY | EARLY CHILDHOOD | SCHOOLS
HEALTHCARE FACILITIES



9.58 kg*
Eq. CO₂/m²

Carbon footprint



Savannah theme



Maritime theme



Altitude theme

Height(s)	1.20 m
Length(s)	2.90 m
Thickness	1 mm
Material(s)	PETg
Fire rating	Bs1d0
Contact with food	Yes
Carbon footprint	9.58 kg* eq. CO ₂ /m ²
Colours	3 themes with 4 pictures (digital printing)
Surface appearance	Smooth matt

Fixing


With SPM acrylic adhesive** or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

Installation mode

By SPM gluing as per SPECIFICATIONS.

NOTE

Joints between panels can be installed edge-to-edge or sealed with a transparent silicone joint.

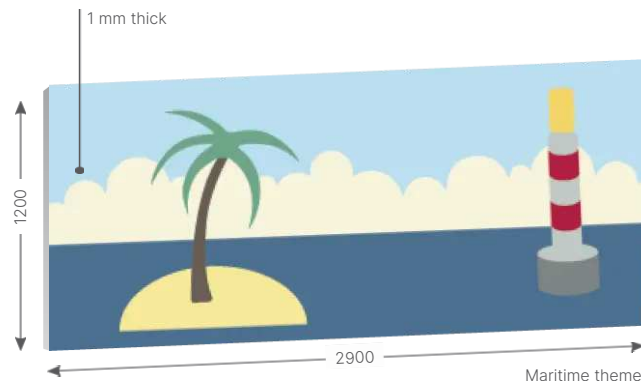

*According to a product life cycle assessment - landfill scenario.
**Bs1d0 fire rating achieved with SPM MS Polymer adhesive. Certificate available on request. Please contact us.

E-brochures. By segment.
Click to discover.



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



DIGITAL PRINT PANELS
DECOPRINT

SPECIFICATIONS

BIM OBJECT

Unleash the creativity of your walls and combine wall protection with personalised decoration!

DECOPRINT brings a touch of originality to establishments looking for an aesthetic solution to protect, cover walls and/or provide information.

Custom HD digital printing on the reverse of the panel to resist scratches and rubbing.

**PHOTOS & RIGHTS***

Online image banks are available: Adobe Stock, Getty, Unsplash, Shutterstock, etc.

PRELIMINARY DRAFT

- Site survey and indication of dimensions
- Expertise dedicated to the project
- Advice on

HEALTHCARE FACILITIES HOTELS RESTAURANTS

SCHOOLS EARLY CHILDHOOD SHOPS


MULTI-FAMILY HOUSING GYMNASIUMS AND SPORTS HALLS

**9.58 kg*
Eq. CO₂/m²****Carbon footprint****Fixing**


With SPM acrylic adhesive** or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

Installation mode

By SPM gluing as per SPECIFICATIONS.

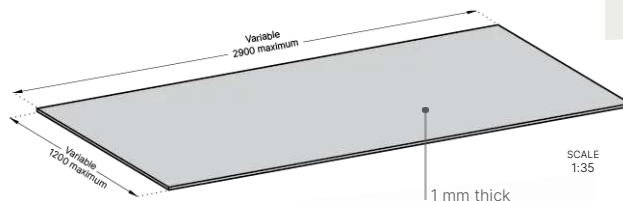SCALE
1:35

Height(s)	1.20 m max.
Length(s)	2.90 m max.
Thickness	1 mm
Material(s)	PETg
Fire rating	Bs1d0
Contact with food	Yes
Carbon footprint	9.58 kg* eq. CO ₂ /m ²
Colours	Translucent for customisation
Surface appearance	Smooth matt

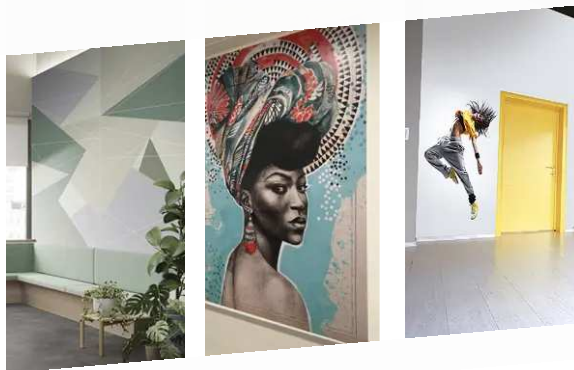**NOTE**

Joints between panels can be installed edge-to-edge or sealed with a transparent silicone joint.

*According to a product life cycle assessment - landfill scenario.

**Bs1d0 fire rating achieved with SPM MS Polymer adhesive. Certificate available on request. Please contact us.

* The images or photographs to be reproduced shall be provided by the user in accordance with SPM's instructions and shall be free of copyright; otherwise, the reproduction rights shall be borne by the user and shall be under their sole responsibility.

E-brochures. By segment.
Click to discover.

**HEALTHCARE****EDUCATION****HOSPITALITY****RETAIL**



A solution in perfect harmony with your wall protection.

Inform, guide and promote key areas of your business with a wide choice of pictograms, lettering and numbers.

4 techniques available: cut-out, hollowed-out, inlaid, printed.

Made to order on resistant plates, adhesive or non-adhesive, in square, round or ovoid shapes, or integrated directly into wall and door protections.



HEALTHCARE FACILITIES RETIREMENT HOMES SHOPS SCHOOLS EARLY CHILDHOOD
HOTELS RESTAURANTS MULTI-FAMILY HOUSING GYMNASIUMS AND SPORTS HALLS

Height(s)	Customisation
Length(s)	Customisation
Thickness	2 mm 1 mm
Material(s)	PVC PETg Option: adhesive
Fire rating	Bs2d0
Contact with food	Yes
Colours	50 Customised printing
Surface appearance	Lightly textured with matt finish ("HydrX" finish) Textured finish : wood, metal, concrete or Corten decor effect Smooth matt (printed version)

✦ Fixing

Pre-adhesive or with SPM acrylic adhesive.

7 Installation mode

Pre-adhesive or adhesive signage as per SPM SPECIFICATIONS.

Standard colours



E-brochures. By segment.
Click to discover.

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL

MEN, WOMEN & PRM



Couple 2



H&F



Mars



Vénus



Soulier



Escarpin



Trio 2



Petit-fils



Handy

LETTERS, NUMBERS & ARROWS



Letters



Play



Arrows



Numbers

DIGITAL



Ordinateur



Prise



Wifi



USB C

HOTEL & RESTAURANT



Serveur



Change



Valise



Pique-nique



Transat



Cocktail



Restaurant



Café



Ascenseur



Escalier



Sortie

EVERYDAY LIFE



Pharmacie



Pilule



Poubelle



Poussette



Laverie



SPA



Recyclage

MOBILITY



Vélo



Trotelec*

SPORT



Haltère



Musculation



Douche



Cintre



Vestiaire Homme



Vestiaire Femme

EARLY CHILDHOOD



Doe
(e.g. Sienna)



Beaver
(e.g. Sienna)



Bear
(e.g. Bark)



Rabbit
(e.g. Clay)



Fish
(e.g. Poppy)



Lioness
(e.g. Sand)



Elephant
(e.g. Granite)



Giraffe
(e.g. Mimosa)



Monkey
(e.g. Bark/
Sienna)



Hippo
(e.g. Pebble)

SIGNAGE
DECOSIGN

GOOD TO KNOW!

Pictograms of your choice and fully customised are possible, subject to compliance with dimensional constraints and prior agreement from the SPM Technical department.

Consult us



FOR WET ROOMS



DECOCHOC, DECOWOOD and DECOTREND panels: the ideal solution for protecting walls and doors in wet environments.

At just 2 mm thick, they cover tiled surfaces and eliminate joint problems.

Combined with our patented SPM MS Polymer adhesive and our finishes, they guarantee a long-lasting watertight joint.

Compliant with French technical standard ATEC no.12/19 - 1782 V2. Can be installed on an occupied site.



Heat-sealing

Heat-sealing between panels



Heat-sealing between panels and flexible floor skirting rise



Bending

L-shaped bend



U-shaped bend



MULTI-FAMILY HOUSING GYMNASIUMS AND SPORTS HALLS

SHOPS

Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Carbon footprint	7.62 kg eq. CO2/m ²
Recycled content	24%
Average service life	25 years
Colours	50
Surface appearance	Lightly textured with matt finish ("HydrX" finish) Textured finish: wood, metal, concrete or Corten decor effect

Standard colours (panels) +



Fixing


With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

Installation mode

By gluing as SPM SPECIFICATIONS.


Customised option(s)

Cutting, L or U folding, thermoforming, chamfering.

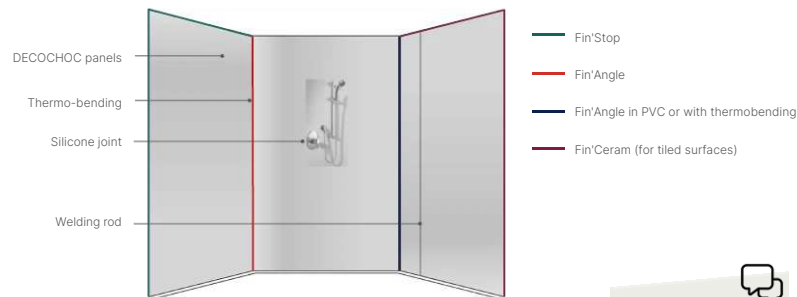

GOOD TO KNOW!

Some substrates require specific advice for installation and gluing. Consult us.

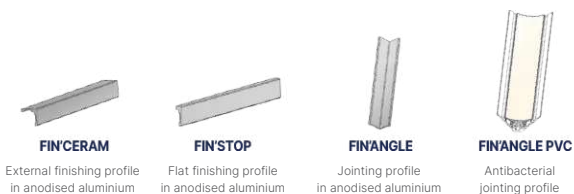

*See page 8: Benefits

E-brochures. By segment.
Click to discover.

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL



The treatment of asbestos in public and private buildings has become a major public health issue in recent years.

The SAFE'COVER system offers a comprehensive, economical, innovative and unique solution. It allows you to operate in subsection 4 and in an occupied environment with a visitable or non-visitable covering process.

Dust level measurements during work comply with the French Public Health Code and the French Labour Code.

MULTI-FAMILY HOUSING GYMNASIUMS AND SPORTS HALLS
SHOPS

Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Fire rating	Bs2d0
Carbon footprint	7.62 kg eq. CO ₂ /m ²
Recycled content	24%
Average service life	25 years
Colours	50
Surface appearance	Lightly textured with matt finish ("HydrX" finish) Textured finish: wood, metal, concrete or Corten decor effect

Standard colours (panels)



E-brochures. By segment.
Click to discover.

HEALTHCARE


EDUCATION

HOSPITALITY

RETAIL



SPECIFICATIONS

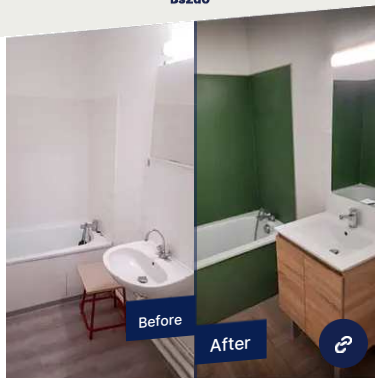

DECOBOWL

Designed using SPM panels, the DECOBOWL solution is installed behind wall-hung WCs to effectively protect the wall.

It prevents the risk of damage such as blistering, peeling paint or damage to plasterboard, often caused by clamping the toilet to a flexible wall covering. DECOBOWL thus offers long-lasting, reliable protection for exposed walls.




SPECIFICATIONS

BIM OBJECT



Installation mode

Bonding in accordance with SPM SPECIFICATIONS (substrate, adhesive and application context allowing Bs2d0 level).

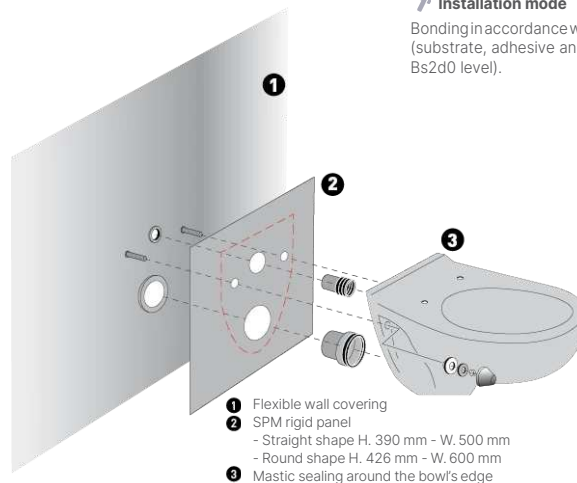

NOTE

Made-to-measure DECOBOWL formats can be produced to guarantee the necessary 10 cm around the various existing sanitary facilities. Consult us.

FINISHING AND JOINTING PROFILES

FIN'ALU

FIN'ALU profiles emphasise the panel jointing and add a top-of-the-range touch to the wall protection.

They provide a perfect finish above and between DECOCHOC, DECOWOOD or DECOTREND protection and covering panels.



HOSPITALS CLINICS RETIREMENT HOMES SHOPS
MULTI-FAMILY HOUSING OFFICES


 Apparent height(s)	H-profile: 21 mm J-profile: 18 mm
 Length(s)	3 m
 Material(s)	Aluminium PVC (base)
 Colours	Satin silver anodised
 Surface appearance	Smooth

Fixing

Use SPM acrylic adhesive for the H-shaped and J-shaped jointing profiles or screw mounted version of the J-shaped finishing profile.

Installation mode

By gluing or screw-mounted as per SPM SPECIFICATIONS.

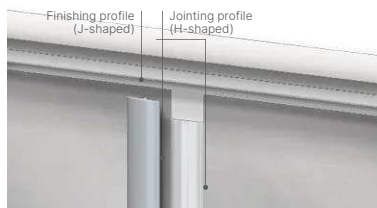

Standard colours 

Satin anodised




SPECIFICATIONS




BIM OBJECT

JOINTING PROFILE (H-SHAPED)

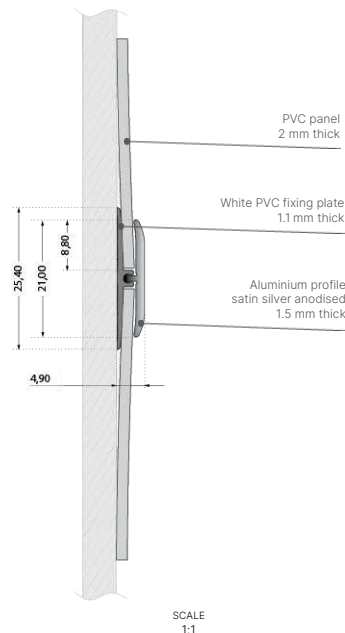

FINISHING PROFILE (J-SHAPED)

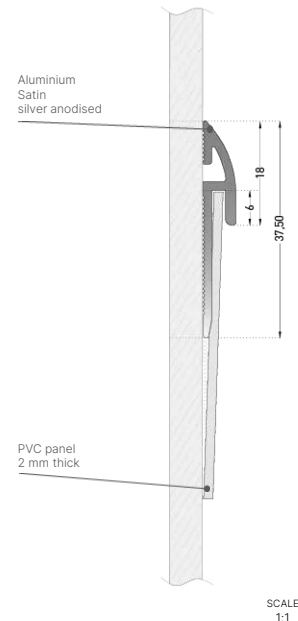

FIN'COLOR finishing and jointing profiles add a discreet decorative touch for a harmonious whole.

They provide an aesthetic finish and a perfect joint between panels or between panels and flexible floor skirting rise.




Fixing


With SPM acrylic adhesive or SPM MS Polymer adhesive sealant (no tacking time, ideal for wet rooms, patent pending).

Installation mode

By SPM gluing as per SPECIFICATIONS.

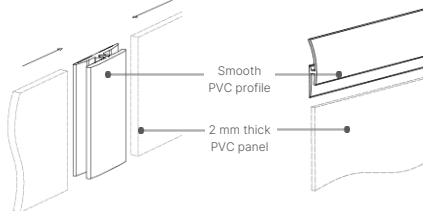


JOINTING PROFILE (H-SHAPED)

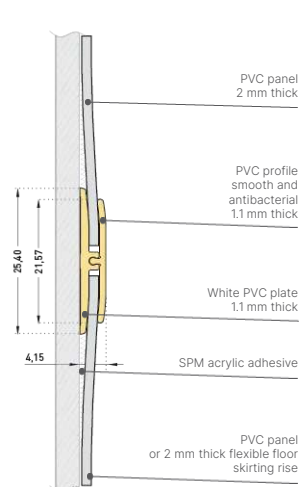

SCALE
1:1

FINISHING PROFILE (J-SHAPED)

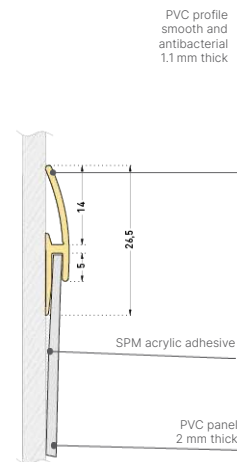

SCALE
1:1

HOSPITALS CLINICS RETIREMENT HOMES SHOPS

MULTI-FAMILY HOUSING SCHOOLS

Apparent height(s) H-profile: 21.57 mm
J-profile: 20.5 mm

Length(s) 3 m

Material(s) PVC

Hygiene 99.9% antibacterial

Fire rating Bs2d0

Colours 39
Through-coloured

Surface appearance Smooth

Standard colours



E-brochures. By segment.
Click to discover.



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



SPECIFICATIONS




BIM OBJECT

FIN'STOP

For finishing protective panels over tiles:

- Provides a perfect horizontal or vertical finish, particularly for shower and bath panels;
- Ideal for renovating damp rooms;
- Simple adhesive fixing.



MULTI-FAMILY HOUSING

	Apparent height(s)	12 mm
	Length(s)	3 m
	Apparent width(s)	4 mm
	Material(s)	Aluminium
	Colours	Satin silver anodised
	Surface appearance	Smooth

★ **Fixing**



With acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending) and SPM MS Polymer adhesive sealant.

🔧 **Installation mode**

By gluing as per SPM SPECIFICATIONS.

Standard colours


Satin anodised



SPECIFICATIONS



BIM OBJECT




Satin silver anodised aluminium

Mastic

SPM MS Polymer adhesive

2 mm thick PVC panel



SCALE
1:2



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL




FINISHING AND JOINTING PROFILES

FIN'CERAM

The FIN'CERAM profile provides an elegant, discreet finish for protective panels installed on tiled surfaces.

It integrates perfectly both horizontally and vertically, particularly around showers and baths, making it an ideal solution for renovating wet rooms. By neatly masking the edges of the tiles, it guarantees a neat finish. It's quick and easy to install with an adhesive fixing system.



MULTI-FAMILY HOUSING

	Apparent height(s)	12 mm
	Length(s)	3 m
	Apparent width(s)	8 mm 12 mm
	Material(s)	Aluminium
	Colours	Satin silver anodised
	Surface appearance	Smooth

Fixing

With acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending) and SPM MS Polymer adhesive sealant.

Installation mode

By gluing as per SPM SPECIFICATIONS.




Standard colours

Satin anodised




SPECIFICATIONS

BIM OBJECT

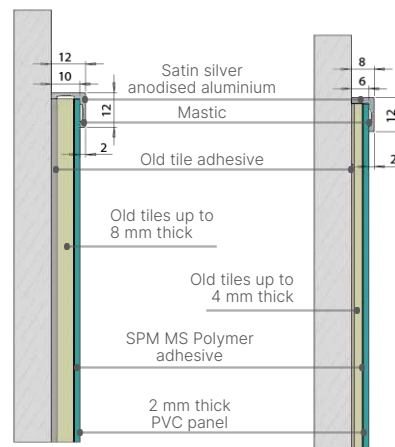

SCALE
1:2

SCALE
1:2



SCALE
1:2

FINISHING AND JOINTING PROFILES

FIN'ANGLE

FIN'ANGLE PVC and FIN'ANGLE ALU jointing profiles are designed for finishing internal corners, particularly in wet rooms and showers.

Quick and easy to install, they are glued (FIN'ANGLE ALU) or clipped (FIN'ANGLE PVC) onto a base previously glued to the wall.

FIN'ANGLE profiles fit perfectly with DECOCHOC panels and guarantee optimum watertightness.



HEALTHCARE FACILITIES MULTI-FAMILY HOUSING

	Length(s)	3 m
	Overall dimensions	2 mm
	Material(s)	PVC Aluminium
	Hygiene	99.9% antibacterial (Fin'Angle PVC)
	Colours	Through-coloured Satin silver anodised
	Surface appearance	Smooth appearance

✦ Fixing



With acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending) and MS Polymer sealant or Hybrid'Fix.



🔧 Installation mode

Bonding in accordance with SPM adhesive and application context).

SPECIFICATIONS (substrate,

FIN'ANGLE PVC standard colours +


FIN'ANGLE ALU standard colours +




FIN'ANGLE PVC
(with base)




FIN'ANGLE ALU

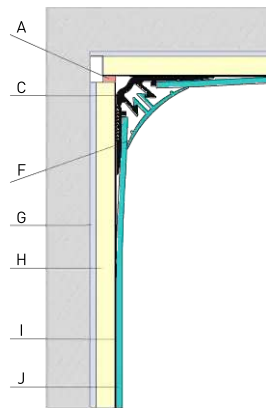

FIN'ANGLE PVC
IN A DRY ENVIRONMENT

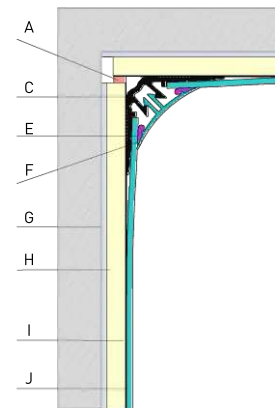

FIN'ANGLE PVC
IN A WET ENVIRONMENT

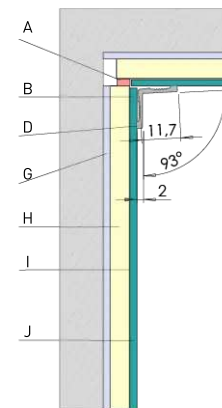

FIN'ANGLE ALU

- A. Old tile joint
- B. Satin silver anodised aluminium
- C. FIN'ANGLE PVC base
- D. Mastic
- E. Hybrid'Fix mastic
- F. FIN'ANGLE PVC cover
- G. Old tile adhesive
- H. Old tile
- I. SPM MS Polymer adhesive
- J. 2 mm thick PVC panel

SCALE
1:1.35



SPECIFICATIONS



BIM OBJECT

E-brochures. By segment.
Click to discover.



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



FINISHING AND JOINTING PROFILES

FIN'LINE

The FIN'LINE ultra-slim finishing profile is a decorative element designed to elegantly accentuate the top of wall protection panels.

It provides a neat finish, whether laid horizontally or vertically, and blends in perfectly with public areas.

Available in contrast or tone-on-tone with the panel, it allows you to customise the appearance while ensuring harmonious visual continuity.



HOTELS RESTAURANTS RETIREMENT HOMES OFFICES

	Apparent height(s)	3.3 mm
	Length(s)	3 m
	Apparent width(s)	5 mm
	Material(s)	Aluminium
	Colours	3
	Surface appearance	Smooth

✦ Fixing

With acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patented solution), or screw-mounted.

🔧 Installation mode

By gluing or screw-mounted as per SPM specifications (substrate, adhesive and application context allowing Bs2d0 level).




SPECIFICATIONS

BIM OBJECT

Powder-coated aluminium

With SPM acrylic adhesive or SPM MS Polymer adhesive

PVC panels
2 mm thick



SCALE
1:1.35

Standard colours



E-brochures. By segment.
Click to discover.

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL



PROTECTION PLATES

CONTACT




SPECIFICATIONS

BIM OBJECT

CONTACT's self-adhesive protection plate is both resistant and decorative.

It ensures perfect protection for walls exposed to scratches and rubbing from furniture, chairs, etc.



Contact 350



Contact 200

HOSPITALS CLINICS RETIREMENT HOMES
DISABILITY CENTRES WAITING ROOMS
OFFICES



Height(s)	350 mm 200 mm
Length(s)	4 m
Thickness	2.5 mm
Material(s)	PVC Foam adhesive
Hygiene	99.9% antibacterial
Fire rating	Bs2d0
Colours	39 Through-coloured
Surface appearance	Smooth with a few decorative grooves

Fixing


Sheet with foam adhesive to be reinforced with SPM universal adhesive sealant.

Installation mode

By adhesive bonding.

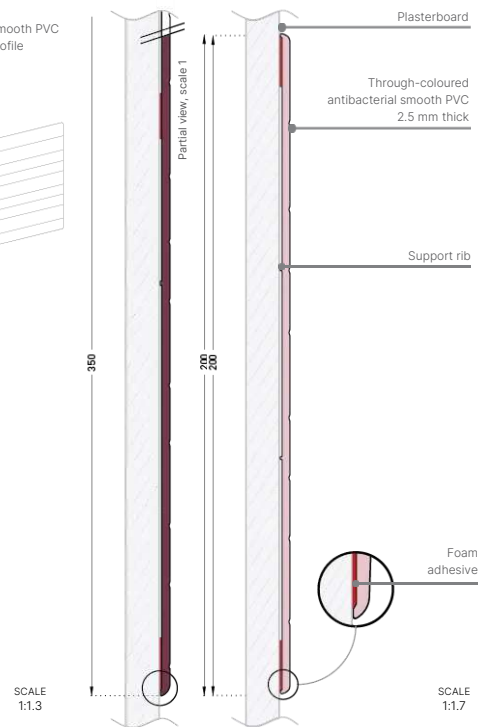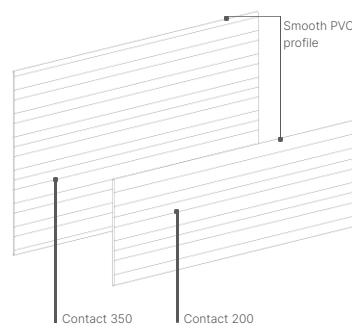

Contact 350 standard colours +



Contact 200 standard colours +



Special order colours*

Contact 200 +

Contact 350 +

*Min. quantity: 200 LM. Lead times: contact us

E-brochures. By segment.
Click to discover.



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



HEADBOARD PROTECTION

LINEA'BEDKIT



The LINEA'BEDKIT vertical headboard protection is specially designed to protect the walls from the impact of beds that are moved or raised, in the bedrooms of healthcare establishments.



HOSPITALS CLINICS RETIREMENT HOMES
DISABILITY CENTRES


Height(s)	600 mm
Width	40 mm
Overall dimensions	Up to 253 mm
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Colours	39 Through-coloured

Fixing

The continuous aluminium profile equipped with the PVC rosette is mounted on the aluminium spacers, which can be cut to size.

Installation mode

On aluminium plates covered with a white PVC rosette, 125 mm in diameter, with concealed metal expansion plugs (4 plugs per plate).

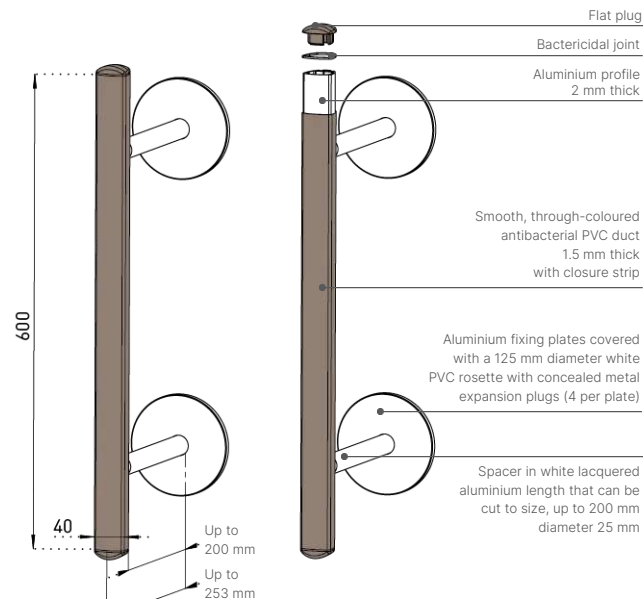


SCALE
1:1.7

*See page 8: Benefits

Standard colours



Special order colours



*Min. quantity: 200 LM. Lead times: contact us

E-brochures. By segment.
Click to discover.



WALL PROTECTION RAILS

LINEA'PUNCH NEO



The Linea'Punch Neo wall protection rail is the ideal combination of impact resistance and design. Designed to blend in with the décor, it is the perfect match for Linea'Touch handrails.

Its narrow, bevelled end pieces minimise the space required and the distance to door frames.

It guarantees easy cleaning and optimum hygiene.

Quick and easy to fit, its double clipping system ensures perfect application. Very strong wall protection.



HOSPITALS CLINICS LABORATORIES WHITE ROOMS
RETIREMENT HOMES BACK AREAS (HOTEL, RESTAURANT)


Height(s)	180 mm
Length(s)	4 m
Overall dimensions	25 mm
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial
Fire rating	Bs2d0
Colours	39 Through-coloured
Surface appearance	Matt with central boss

Fixing

On aluminium clip.
Option: On continuous aluminium rail.

Installation mode

The middle section of the profile is 0.80 m above the floor for mid-wall protection or above the skirting board for bottom section protection. Mounted by clipping onto "4-point" aluminium clips every 0.75 m maximum or, as an option, on a continuous aluminium rail.

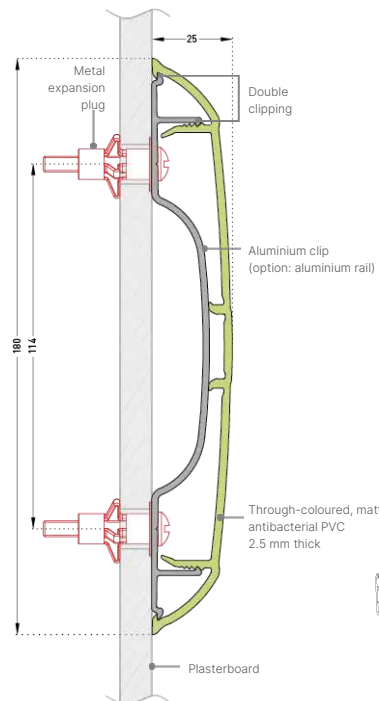


SCALE
1:1.8

Mounted on aluminium
clips every 0.75 m

NOTE

The end-piece acts as the first clip.

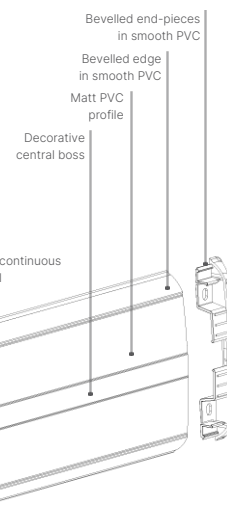

Standard colours



Special order colours



*Min. quantity: 200 LM. Lead times: contact us


E-brochures. By segment.
Click to discover.



WALL PROTECTION RAILS
IMPACT

The Impact wall protection rail is a horizontal wall protection rail with a rounded shape that perfectly combines impact resistance and aesthetics.

It can be installed at one or two heights to protect walls exposed to heavy trolley traffic in corridors, access zones and storage areas.



HOSPITALS CLINICS RETIREMENT HOME LABORATORIES
WHITE ROOMS REAR AREAS (HOTELS - RESTAURANTS)


Height(s)	200 mm 120 mm 60 mm
Length(s)	4 m
Overall dimensions	30 mm
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial
Fire rating	Bs2d0
Colours	39 Through-coloured
Surface appearance	Smooth with a few decorative grooves

Fixing

On aluminium clip.
Option: On continuous aluminium rail.

Installation mode

The middle section of the profile is 0.80 m above the floor for mid-wall protection or above the skirting board for bottom section protection. Mounted by clipping onto "4-point" aluminium clips every 0.75 m maximum or, as an option, on a continuous aluminium rail.

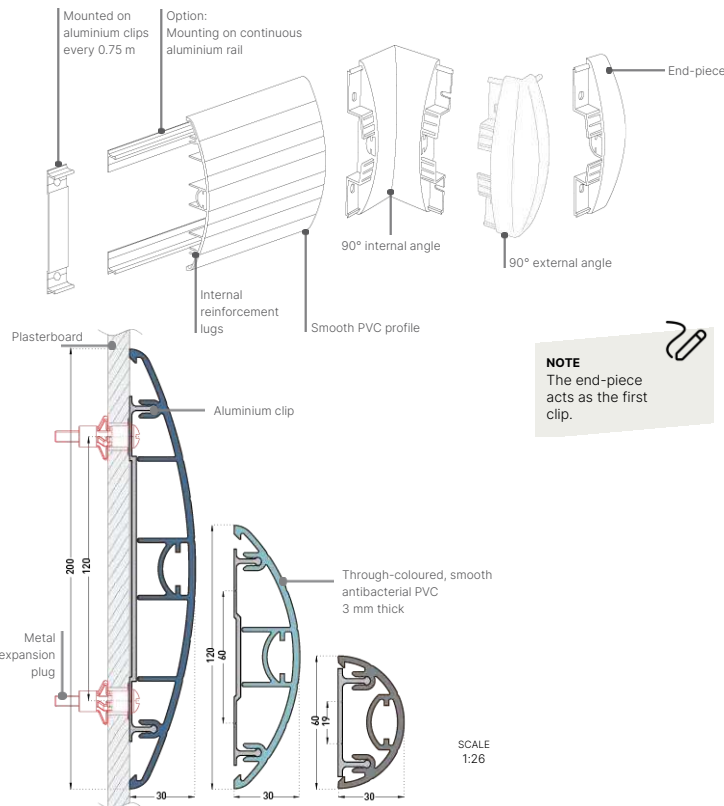


SCALE
1:26

Impact 200 & Impact 120 standard colours



Impact 60 standard colours



E-brochures. By segment.
Click to discover.



*Min. quantity: 200 LM. Lead times: contact us

WALL PROTECTION RAILS

PUNCH'INOX


The PUNCH'INOX wall protection rail is a made-to-measure kit solution, with welded end pieces.

This wall protection rail is recommended for exposed areas requiring a high level of hygiene.

It has 304 L food approval and is suitable for wet environments.

HOSPITALS CLINICS RETIREMENT HOMES
DISABILITY CENTRES PHARMACEUTICAL INDUSTRIES
CENTRAL KITCHENS FOOD INDUSTRIES

Height(s)	200 mm 150 mm 100 mm
Length(s)	Customised (max. 2.50 m)
Overall dimensions	32 mm
Material(s)	Stainless steel 12/10th
Contact with food	Yes
Surface appearance	Brushed

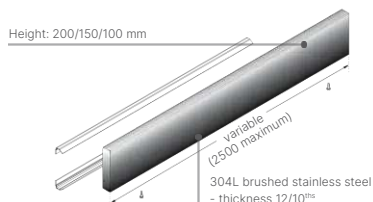

SPECIFICATIONS




Fixing

On aluminium rail.

Installation mode

The middle section of the wall protection rail is 0.80 m above the floor for mid-wall protection or above the skirting board for bottom section protection.

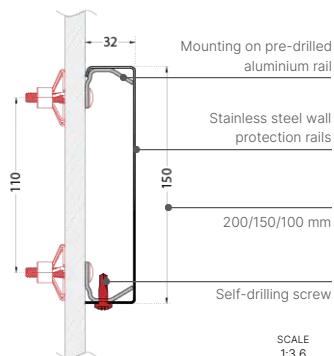

SCALE
1:3.6



SPECIFICATIONS



BIM OBJECT

PLAC'INOX

The Plac'Inox protection plate reinforces areas exposed to impact.

It has 304L food approval and is suitable for high-traffic areas or wet environments.

HOSPITALS CLINICS RETIREMENT HOMES
DISABILITY CENTRES CENTRAL KITCHENS
PHARMACEUTICAL INDUSTRIES FOOD INDUSTRIES


Height(s)	Customised (max. 1.25 m)
Length(s)	Customised (max. 2.50 m)
Thickness	10/10th (1 mm)
Material(s)	Stainless steel 10/10th
Contact with food	Yes
Surface appearance	Brushed

Fixing

With SPM MS Polymer adhesive sealant or MS Polymer adhesive in buckets (no tacking time, ideal for wet rooms, patent pending).

Installation mode

By SPM gluing as per SPECIFICATIONS.

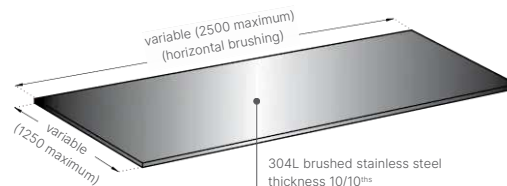

WALL PROTECTION RAILS

ELASTO'PUNCH



SPECIFICATIONS

BIM OBJECT

Thanks to their dense shapes, ELASTO'PUNCH wall protection rails effectively protect the walls most exposed to impact and friction from ride-on forklift trucks or heavy goods vehicles.

The black elastomer material makes it ideal for both indoor and outdoor use.



Elasto'punch 200E



Elasto'punch 100D





LOGISTICS CORRIDORS STORAGE AREAS WAREHOUSES

CAR PARKS LOADING BAYS

Height(s)	Model 200 E: 200 mm Model 100 D: 100 mm
Length(s)	3 m
Overall dimensions	Model 200 E: 30 mm Model 100 D: 90 mm
Thickness	Model 200 E: 15 to 30 mm Model 100 D: 14 mm
Material(s)	Elastomer
Colours	Black Through-coloured

Fixing and Installation

Screw-mounted.

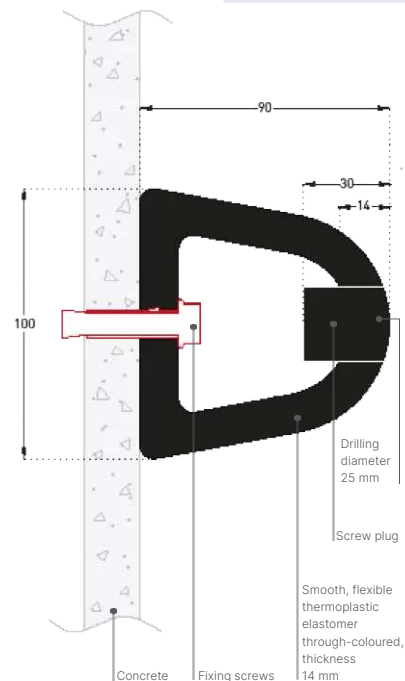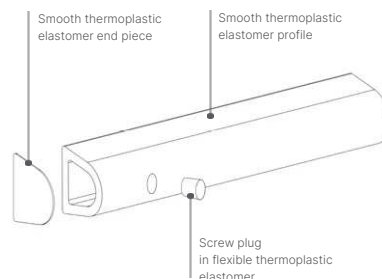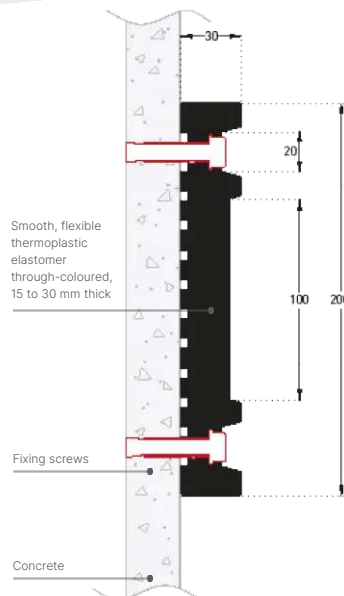




DOOR PROTECTION

The constant comings and goings of customers, patients and staff, the impact of rolling stock, trolleys... Whatever the public access building, doors are put to a severe test.

SPM has developed a range of protective panels and handplates for total or partial cover, with the protection and decoration of the building as the number one objective.



Original and specific cut shapes, heat bending, frame protection... SPM offers a wide range of products to meet all your needs.

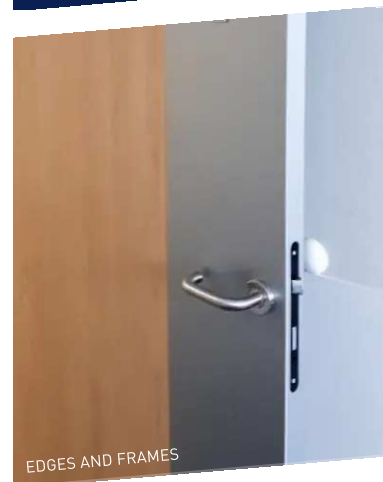

CONTENTS



Covering and protection



Signage



Technical solutions

FULL-HEIGHT DOOR _____ 62  

HALF-HEIGHT DOOR _____ 62  

FOOT-HEIGHT DOOR _____ 62  

HALF-HEIGHT
DECORATIVE DOOR _____ 63  

EDGES & FRAMES _____ 64  

HANDPLATES _____ 65  

INLAID SIGNAGE _____ 66  

TOOLS _____ 68

FIXING _____ 69

 Traffic intensity
 Resistance to impacts

FULL-HEIGHT DOOR, HALF-HEIGHT DOOR & FOOT-HEIGHT DOOR



SPECIFICATIONS

BIM OBJECT

DECOCHOC, DECOWOOD and DECOTREND panels protect the entire door or its sensitive areas.

Matching our wall protectors, they can be used to create a uniform decor, play with contrasts or integrate signage.



HOSPITALS CLINICS RETIREMENT HOMES HOUSING
SCHOOLS HOTELS RESTAURANTS

	Height(s)	3 m
	Length(s)	1.30 m
	Thickness	2 mm
	Material(s)	PVC
	Hygiene	99.9% antibacterial 99.96% virucidal*
	Fire rating	Bs2d0
	Contact with food	Yes
	Carbon footprint	7.62 kg eq. CO ₂ /m ²
	Recycled content	24%
	Average service life	25 years
	Colours	50
	Surface appearance	Solid colours: lightly textured, matt "HydrX" finish Textured finish: wood, metal, concrete or Corten decor effect

Fixing


With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

Installation mode

By gluing as per SPM SPECIFICATIONS.

Customised option(s)

Cutting, L or U folding, thermoforming, chamfering.

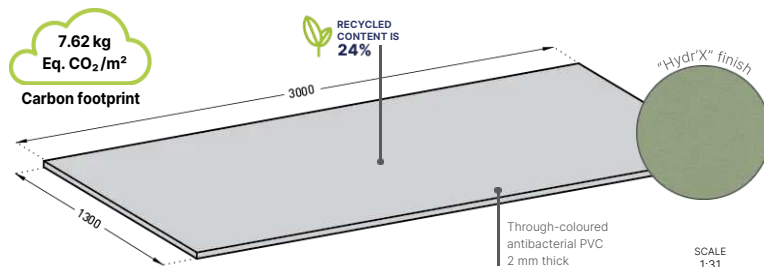

Recommended height of protection:
- 1/2 height door: between 900 mm and 1300 mm
- foot-height door: between 200 mm and 359 mm

GOOD TO KNOW!

Plac'Inox: see page 58.
Signage: see pages 66 and 67.

Standard colours +



Discover the brochures
Access brochures by theme

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL

+

*See page 8: Benefits

SPM
wall protection

HALF-HEIGHT DECORATIVE DOOR SINGLE COLOUR OR TWO-TONE



SPECIFICATIONS



BIM OBJECT

SPM decorative ½ height doors guarantee effective protection of the lower part of the door - the most exposed -, integrating the handle or not, depending on your needs. Many cut shapes and colour combinations are available: single colour or two-tone for a classic or more original effect.

Shapes and colours make it easier to identify rooms, offices, technical rooms and services, and can match the colour of the floor or level. This is an essential point in the accessibility process.



HOSPITALS CLINICS RETIREMENT HOMES OFFICES
SCHOOLS HOTELS RESTAURANTS SHOPS

Height(s)	1.20 m
Width(s)	930 mm 1230 mm
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO ₂ /m ²
Recycled content	24%
Average service life	25 years
Colours	50
Surface appearance	Solid colours: lightly textured, matt "HydrX" finish Textured finish: wood, metal, concrete or Corten decor effect


Fixing

With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).



Installation mode

By SPM gluing as per SPECIFICATIONS.

SINGLE COLOUR

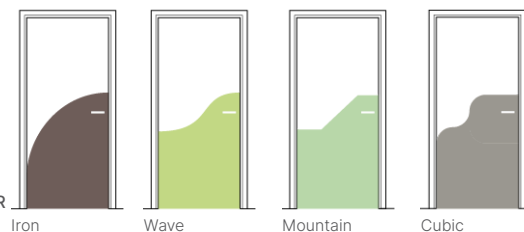

TWO-TONE

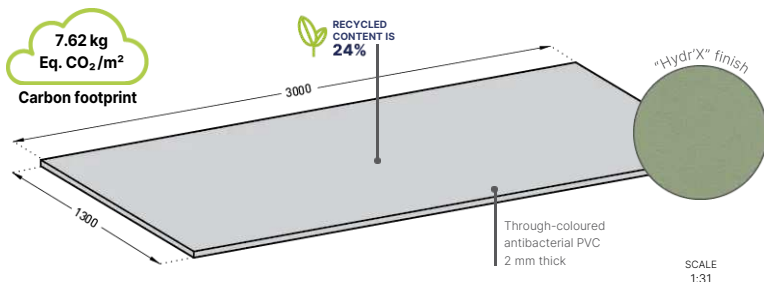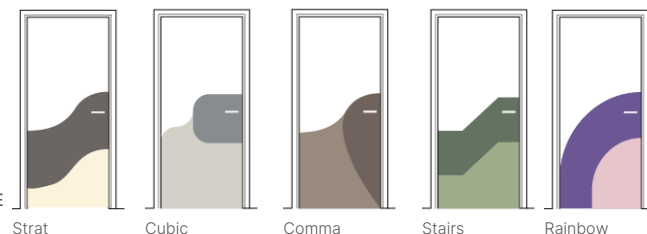

Standard colours



Discover the brochures
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



*See page 8: Benefits

EDGES & FRAMES




SPECIFICATIONS



BIM OBJECT

The L- or U-shaped bends of our protective and covering panels protect the edges and frames from repeated impacts and from damage caused by rising damp in certain rooms, thereby prolonging the life of the door units.

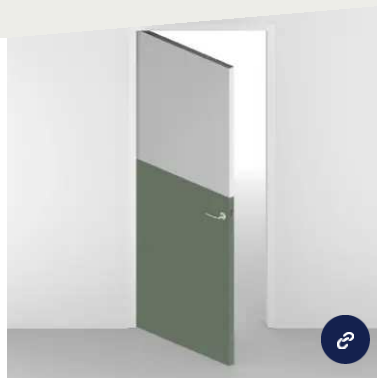

HOSPITALS | CLINICS | RETIREMENT HOMES
DISABILITY CENTRES | SCHOOL ESTABLISHMENTS
HOTELS | RESTAURANTS | HOUSING | SHOPS

Height(s)	3 m
Length(s)	1.30 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO ₂ /m ²
Recycled content	24%
Average service life	25 years
Colours	50
Surface appearance	Solid colours: lightly textured, matt "HydrX" finish Textured finish: wood, metal, concrete or Corten decor effect

Fixing


With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

Installation mode

By gluing as per SPM SPECIFICATIONS.

GOOD TO KNOW!

Panels can be thermoformed to protect complex frames.

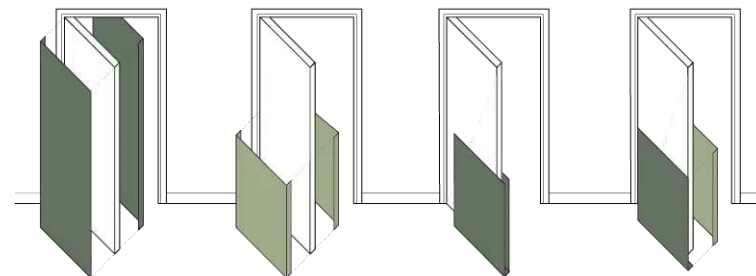
2 L-shaped bends
(full-height door)2 U-shaped bends
(side edges)U-shaped bend
(bottom edges)U-bend and L-bend
(sealing)

Treatment of complex corners 2 solutions:


7.62 kg
Eq. CO₂/m²
Carbon footprint

RECYCLED
CONTENT IS
24%

Through-coloured
antibacterial PVC
2 mm thick



SCALE
1:75

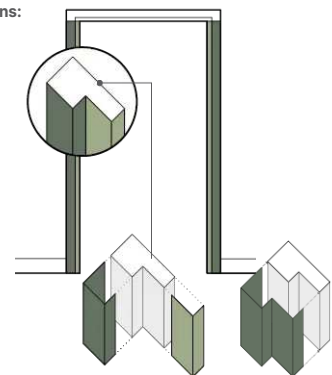U-bend and L-bend
with silicon joint
(frames)Thermoforming.
Protection of complex
frames

Standard colours



Discover the brochures
Access brochures by theme

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL

+

*See page 8: Benefits

SPM
wall protection

HANDPLATES



SPECIFICATIONS



BIM OBJECT

SPM backplates come in a variety of original shapes to decorate and protect the door around the handle.



DISABILITY CENTRES SCHOOL ESTABLISHMENTS
HOSPITALS CLINICS RETIREMENT HOMES OFFICES
HOTELS RESTAURANTS SHOPS MULTI-FAMILY HOUSING


Height(s)	3 m
Length(s)	1.30 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO2/m ²
Recycled content	24%
Average service life	25 years
Colours	50
Surface appearance	Solid colours: lightly textured, matt "HydrX" finish Textured finish: wood, metal, concrete or Corten decor effect

Fixing


With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

Installation mode


By gluing or use of adhesive as per SPM SPECIFICATIONS.




Plac'net




Delta




Eclipse




Wooden




Dan




Nö



Glass



Lady



Man

Standard colours



Discover the brochures
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



*See page 8: Benefits

INLAID SIGNAGE



SPECIFICATIONS



BIM OBJECT

SPM's door protection allows you to integrate personalised signage (numbers, letters, pictograms, drawings): durable, visible from a distance and easy to maintain.

A choice of two techniques:

Inlaid: integrated into the SPM protection.

Hollow: inverted relief, revealing the background colour of the door.

Two aesthetic, hygienic and economical solutions.



HOSPITALS CLINICS RETIREMENT HOMES SPECIALIST FACILITIES SCHOOLS
HOTELS RESTAURANTS HOUSING OFFICES SHOPS GYMS SPORTS HALLS

Height(s)	400 mm Customisation
Length(s)	1.30 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO2/m ²
Recycled content	24%
Average service life	25 years
Colours	50
Surface appearance	Solid colours: lightly textured, matt "HydrX" finish Textured finish: wood, metal, concrete or Corten decor effect

Fixing

With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

Installation mode

By gluing or use of adhesive as per SPM SPECIFICATIONS.

GOOD TO KNOW!

You can find all SPM Decosign pictograms on page 44.

Standard colours



Discover the brochures
Access brochures by theme



HEALTHCARE




EDUCATION



HOSPITALITY



RETAIL

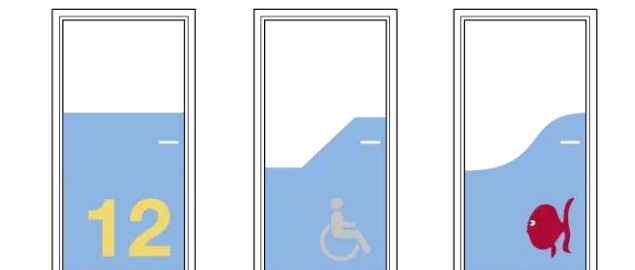

Signage
Numbers

Signage
Pictos

Early childhood signage
- Fish -

*See page 8: Benefits



Before



After

TOOLS

LEISTER WALL WELDER CASE



Special case containing all the tools you need to make perfect welds between SPM panels or between SPM panels and vinyl flooring.

CONTENT



Leister electric welding gun and a spare resistance




Rapid pinch nozzle, diameter 4/5 mm



Rapid triangular nozzle with vent 4/5 mm



Nozzle brush (Length 160 mm)



Mozart "2 in 1" levelling knife and 5 spare blades



Triangular groover (length: 24 cm, 6 cm on side)



Levelling groover with round blade

CUTTER WITH HOOK BLADE



Blade shape particularly suitable for cutting PVC profiles and panels.

DESCRIPTION

- Aluminium and plastic cutter
- Length 140 mm
- With a tungsten carbide hook blade and a blade for all jobs

DOUBLE-HANDLED SMOOTHING ROLLER



Ideal for smoothing SPM panels after gluing; high veneer pressure thanks to its double handles and easy handling.

DESCRIPTION

- Roller length: 160 mm
- Roller diameter: 40 mm
- Dimensions (L x W x H): 210 mm x 180 mm x 120 mm

VIDEO

Decochoc installation

[WATCH VIDEO](#)



SPM MS POLYMER is a patented adhesive designed for glueing wall protection panels.

- No tacking time
- Fast installation thanks to its high tack
- Ideal for use in wet environments
- Expansion can be divided by 4
- Bonding system complying with fire standard Bs1d0 and Bs2d0

It can be used on absorbent and non-absorbent substrates.



Installation mode

Substrates must be dry, clean and free of all traces of adhesive (DTU 59-4). All porous surfaces must be primed. Apply 250g to 350g/m² (depending on the substrate) using an A2 notched trowel over the entire surface of the wall.

Smooth by pressing firmly over the entire surface from the centre outwards, crushing the glue grooves.

Joint treatment: after 24 hours.

Fixing

Glue opening exposure time: 40 minutes maximum under ideal application conditions of 18° to 25°C, a substrate temperature above 15°C and relative air humidity below 65%. Low temperature and low humidity extend working, setting and drying times, while high temperature and high humidity reduce them.

For smooth surfaces such as painted doors, use a light abrasive before applying the adhesive.

Packaging	11 kg (in bucket)
Storage duration	12 months (at room temperature in original packaging)
Frost resistance	-25°C
Tacking time	None
Opening time	40 minutes
Consumption	250 – 350 g/m ²
Application	A2 type notched trowel
Fire rating standard	Bs1d0 - Bs2d0 with SPM, A+ panels
Environment	Solvent-free

FIXINGS



SPM universal primer

Use 100 to 150 g/m².

5 L can



SPM acrylic adhesive

Simple solvent-free gluing.
Use 250 to 320 g/m².

Comes in 6 or 14 kg buckets



SPM MS Polymer adhesive sealant

In cartridges.

MS solvent-free polymer.

290 ml cartridge (approx. 25 m of beading)



Welding bead

For Decochoc, Decowood, Decotrend and Decoclean panels (assorted colours).

100 m spool



Double sided foam adhesive roll 4957/15

Width 15 mm.

25 m roll

(please consult us before use)



Double sided adhesive roll 4970/50

Width of 50 mm for installation on doors or laminate.

50 m roll

(please consult us before use)



Silicone joint

For Decochoc, Decowood, Decotrend and Decoclean panels (assorted colours).

310 ml cartridge (approx. 12 m of beading)



CORNER PROTECTION

Often exposed to intense impact, corners need to be well protected.

SPM has developed a complete range of corner protectors designed to provide effective protection that does not cause injuries. Our corner protections are available:

- in adhesive form, for less exposed corners,
- on an aluminium base plate, for high-traffic areas.

All our models have the same properties:

- resistance to impact, cleaning products and disinfectants,
- Bs2d0 reaction to fire classification.



Our corner protectors are suitable for all corner and frame types, and even for renovation work.



PROTECTION

CONTENTS



PROFILA 50 & 30 _____ 73

PROTECTA 2 _____ 74

LINEA'FLEX _____ 75

PROFIL'INOX 50 & 30 _____ 76

SAFY'CORNER _____ 77

SAFY'DOOR _____ 77

ELASTO'FLEX 100V _____ 78

COMBO'CORNER 75 & 50 _____ 79

CORNEA _____ 80

CORNEAFLEX _____ 81



Traffic intensity

Resistance to impacts



NURSING HOME - LABASTIDE ST SERNIN - FRANCE
Profila 50 corner protector/Decochoc panels

Discover the brochures
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL




ADHESIVE CORNER PROTECTORS

PROFILA 50 & 30



PROFILA 50 and 30 finish corner protectors can be integrated into any interior to protect corners, and are quick and easy to fit thanks to two strips of double-sided adhesive.

Profila 30 can also be used to protect certain door frames.

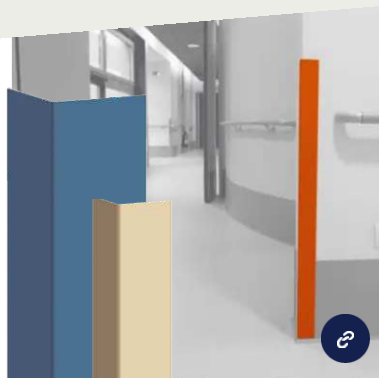

HOSPITALS CLINICS RETIREMENT HOMES OFFICES
HOTELS RESTAURANTS SHOPS

Height(s)	1.30 m 2 m 4 m
Width of wings	50 mm Profila 50 30 mm Profila 30
Thickness	2 mm
Angular opening	90°
Material(s)	PVC
Hygiene	99.9% antibacterial
Fire rating	Bs2d0
Colours	39 Through-coloured
Surface appearance	Smooth

Fixing

Adhesive strip to be reinforced with SPM MS Polymer adhesive sealant.


Installation mode

With included adhesive tape (additional reinforcement with SPM glue is recommended).




GOOD TO KNOW!

Looking for a wood or Trend finish corner protector? [Consult us.](#)

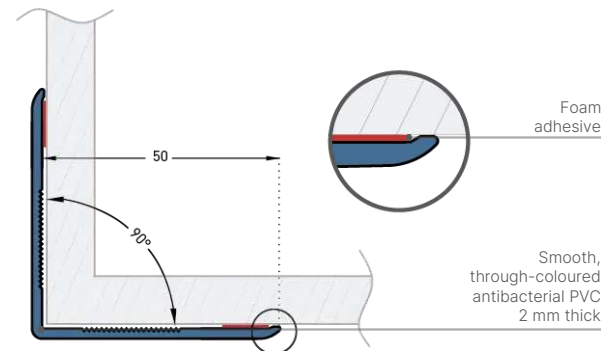

SCALE
1:1.2

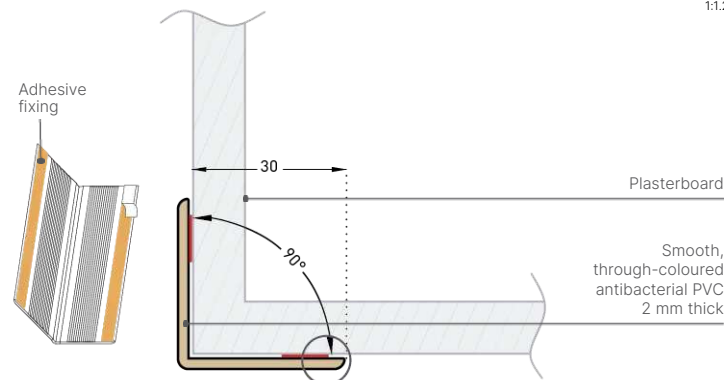

SCALE
1:1.1

Standard colours



Discover the brochures
Access brochures by theme



ADHESIVE CORNER PROTECTORS

PROTECTA 2



SPECIFICATIONS

[BIM OBJECT](#)

The PROTECTA 2 corner protector, with its rounded edging, provides effective, decorative and economical protection.

It protects all wall corners exposed to repeated impacts.

With two strips of foam adhesive, it's quick and easy to mount.



HOSPITALS CLINICS RETIREMENT HOMES OFFICES
SCHOOLS HOTELS RESTAURANTS SHOPS

Height(s)	1.30 m 2 m 4 m
Width of wings	60 mm
Thickness	2 mm
Angular opening	50° to 155°
Material(s)	PVC
Hygiene	99.9% antibacterial
Fire rating	Bs2d0
Colours	39 Through-coloured
Surface appearance	Smooth

Fixing


Adhesive strip to be reinforced with SPM MS Polymer adhesive sealant.

Installation mode

With included adhesive tape (additional reinforcement with SPM glue is recommended).

Adhesive fixing

Foam adhesive

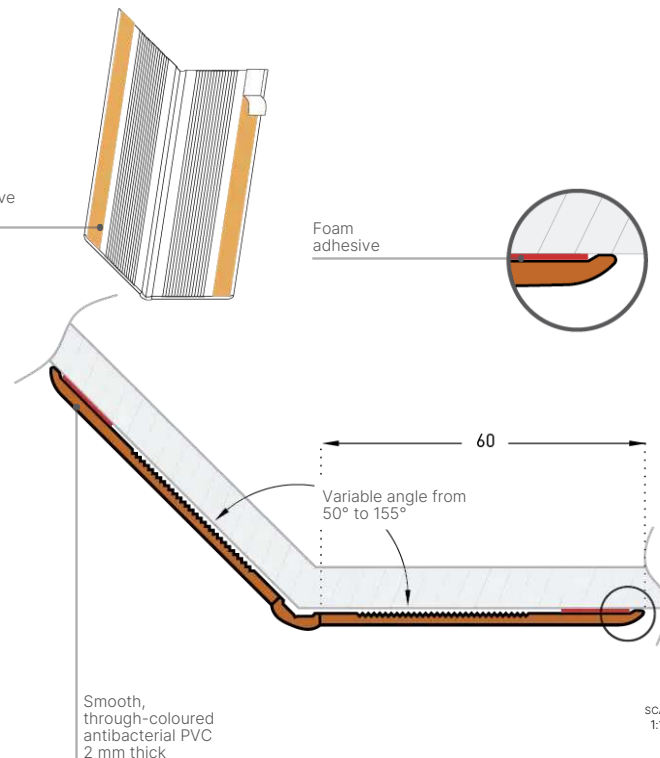

SCALE
1:1.1

Standard colours



Discover the brochures
Access brochures by theme

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL

+

spm
wall protection

ADHESIVE CORNER PROTECTORS

LINEA'FLEX



SPECIFICATIONS

BIM OBJECT


The LINEA'FLEX corner protection combines strength, flexibility and discretion.

It provides effective protection for all wall corner protectors from 80° to 115°, thanks to its flexible central section supported by 2 shock absorbers for extra strength.

Equipped with a variable-angle plug, it adapts to any height and guarantees perfect hygiene.

With two strips of foam adhesive, it's quick and easy to mount.

HOSPITALS CLINICS RETIREMENT HOMES OFFICES
HOTELS RESTAURANTS FACILITIES SHOPS

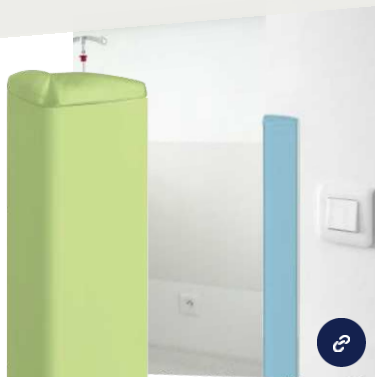

Height(s)	1.30 m 2 m 4 m
Width of wings	45 mm
Thickness	1 to 3 mm
Angular opening	80° to 115°
Material(s)	PVC
Hygiene	99.9% antibacterial
Fire rating	Bs2d0
Colours	39 Through-coloured
Surface appearance	Smooth

Fixing

Adhesive strip to be reinforced with SPM MS Polymer adhesive sealant.

Installation mode

With included adhesive tape (additional reinforcement with SPM glue is recommended).


Smooth PVC variable angle plug

Flexible PVC shock absorbers


Smooth PVC profile, thickness from 1 to 3 mm

80° to 115°

Foam adhesive



Variable angle from 80° to 115°

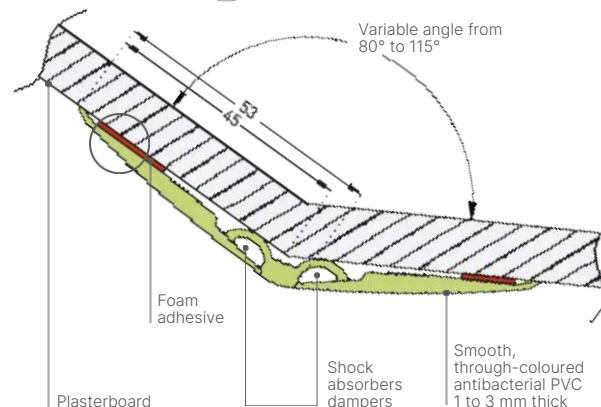

Standard colours



Discover the brochures
Access brochures by theme

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL

SCALE
1:1.1

ADHESIVE CORNER PROTECTORS

PROFIL'INOX 50 & 30



SPECIFICATIONS

BIM OBJECT

PROFIL'INOX corner protector features a rounded corner edge and slightly bevelled flanges.

It protects 90° corners exposed to impact and has food approval. It is ideal for wet environments.

HEALTHCARE FACILITIES RETIREMENT HOMES
HOTELS RESTAURANTS CENTRAL KITCHENS
AGRI-FOOD INDUSTRIES PHARMACEUTICAL INDUSTRIES





Height(s)	2.50 m
Width of wings	50 mm 30 mm
Thickness	10/10 ^{ths}
Angular opening	90°
Material(s)	Stainless steel (304 L)
Contact with food	Yes
Surface appearance	Brushed

Fixing


Adhesive strip to be reinforced with SPM MS Polymer adhesive sealant.

Installation mode

With included adhesive tape (additional reinforcement with SPM glue is recommended).

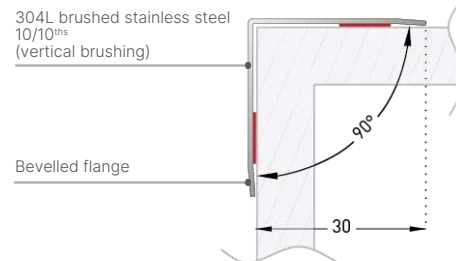

SCALE 1:1

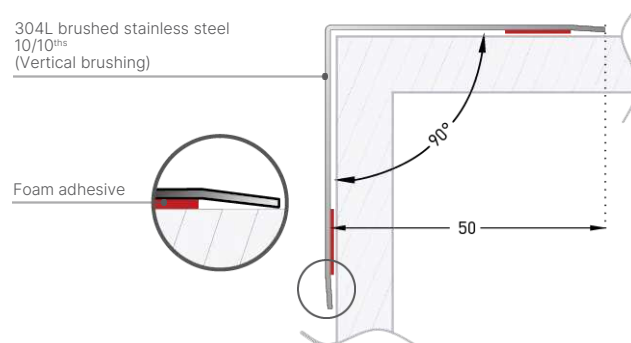

SCALE 1:1.1

Standard colours

Brushed finish

Discover the brochures
Access brochures by theme



CORNER PROTECTION

ADHESIVE CORNER PROTECTORS

SAFY'CORNER


The SAFY'CORNER90° self-adhesive shock-absorbing corner protector protects people against impact from a sharp angle.

The flexibility of its elastomer material gives it a high impact absorption capacity, minimising the risk of injury.

With two strips of foam adhesive and a protective film, it's easy to mount and clean.

NURSERIES, NURSERY SCHOOLS RETIREMENT HOMES
DISABILITY CENTRES GYMNASIUMS

Height(s)	1.30 m
Width of wings	25 mm
Thickness	11 mm
Angular opening	90°
Material(s)	Elastomer
Colours	4 Through-coloured
Surface appearance	Smooth



Standard colours



Discover the brochures
Access brochures by theme

HEALTHCARE


EDUCATION

HOSPITALITY

RETAIL




SPECIFICATIONS

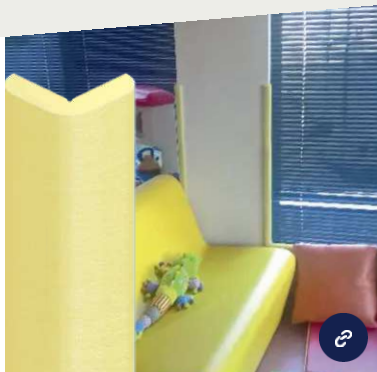

Fixing and Installation

By adhesion with foam adhesive tape.

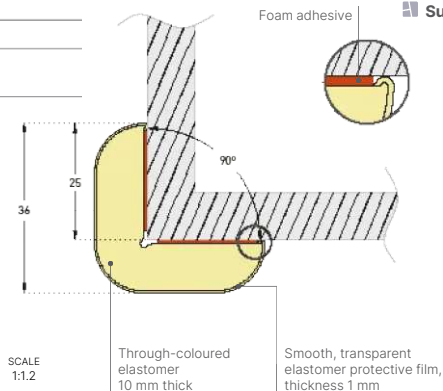

DOOR FINGER PROTECTION SYSTEM

SAFY'DOOR


The SAFY'DOOR finger-pinch proof door system secures doors, whether they are single or swing-opening.

The specific geometry of the strong, flexible bellows prevents fingers from getting into the door rebates.

The Safy'Door finger-pinch proof device improves safety in areas frequented by children and staff alike, by preventing a major cause of accidents with serious consequences.

NURSERIES, NURSERY SCHOOLS RETIREMENT HOMES
DISABILITY CENTRES CENTRAL KITCHENS HOTELS RESTAURANTS

Height	1.40 m
Width	170 mm (rebate side) 70 mm (hinge side)
Thickness	2 mm
Materials	Elastomer
Colours	4 Through-coloured
Surface appearance	Smooth

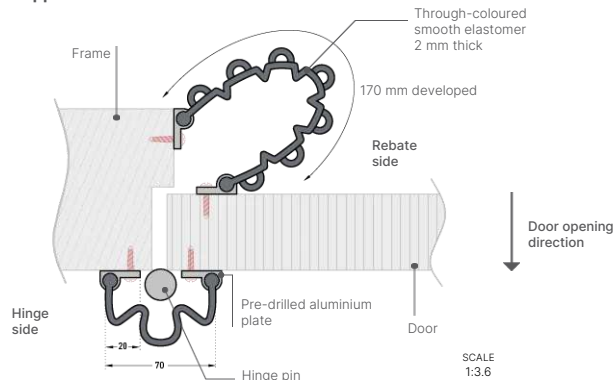

SPECIFICATIONS

BIM OBJECT



Fixing

Mounted on pre-drilled aluminium plates.

Installation mode

Screwed to the door and frame.

SCREW-ON CORNER PROTECTORS

ELASTO'FLEX 100V




SPECIFICATIONS

[BIM OBJECT](#)

ELASTO'FLEX 100V variable corner protector is the highly resistant protection for 45° to 135° corners in your industrial buildings.

It blends in perfectly with all types of areas subject to severe impacts, and its black elastomer material makes it ideal for both indoor and outdoor use.

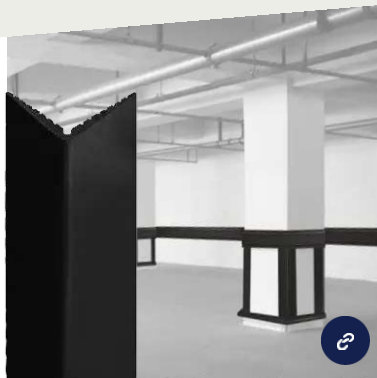


INDUSTRIES HEALTHCARE FACILITIES CENTRAL KITCHENS

Height(s)	3 m
Width of wings	100 mm
Thickness	End: 4 mm Corner edge: 10 mm
Angular opening	45° to 135°
Material(s)	Flexible elastomer
Colours	Black
Surface appearance	Smooth


Fixing and Installation

Screwed in with fixing screw.

45° to 135°



Smooth thermoplastic elastomer profile

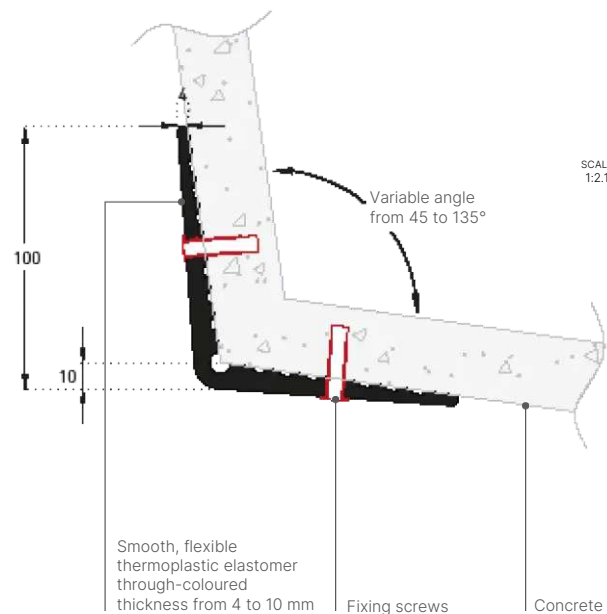

Discover the brochures
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



CORNER PROTECTORS ON ALUMINIUM PLATE

COMBO'CORNER 75 & 50



COMBO'CORNER 75 and 50 angle irons on aluminium plates protect 90° and 135° corners and are highly effective in high-traffic areas for people and materials.



HEALTHCARE FACILITIES SCHOOLS

Height(s)	1.30 m 2 m 4 m
Width of wings	46 mm Combo Corner 50 68 mm Combo Corner 75
Overall dimensions	End: 6 mm Corner edge: 10 mm
Angular opening	90° Combo Corner 75 and 50 135° Combo Corner
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial
Colours	39 Through-coloured
Surface appearance	Smooth or slightly textured matte (HydrX finish)

Standard colours



Discover the brochures
Access brochures by theme





Fixing

Screwed to walls using metal expansion plugs.

Installation mode


On aluminium plate.

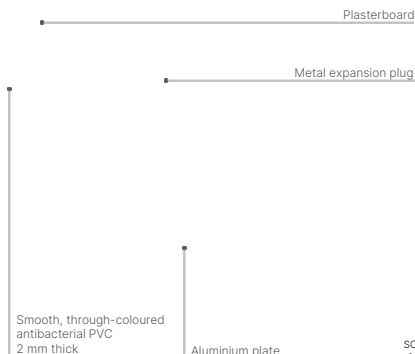

GOOD TO KNOW!


COMBO'CORNER 75 is also available in a 135° angle version.

SCALE 1:1.5

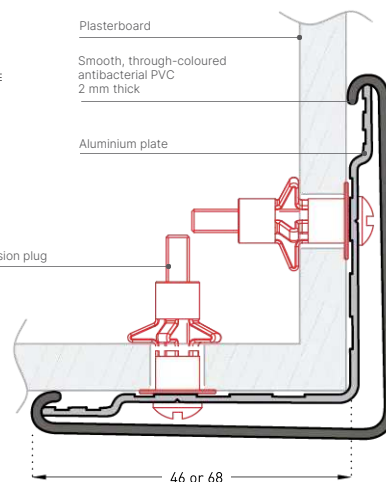

SCALE 1:0.8

Special order colours



*Min. quantity: 200 LM. Lead times: contact us

CORNER PROTECTORS ON ALUMINIUM PLATE

CORNEA



CORNEA is a high-resilience corner protector thanks to the unique design of its rounded edge.

It provides effective protection that does not cause injuries for 90° corners exposed to violent impacts from trolleys, stretchers, etc.



HOSPITALS CLINICS LABORATORIES
CENTRAL KITCHENS SCHOOLS

Height(s)	1.30 m 2 m 4 m
Width of wings	60 mm
Thickness	2.5 mm
Angular opening	90°
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial
Colours	39 Through-coloured
Surface appearance	Smooth

✦ **Fixing**
Screwed to walls using metal expansion plugs.

➤ **Installation mode**
On pre-drilled aluminium plate.

Standard colours +



Discover the brochures
Access brochures by theme

HEALTHCARE

EDUCATION

HOSPITALITY


RETAIL

+




SPECIFICATIONS

BIM OBJECT

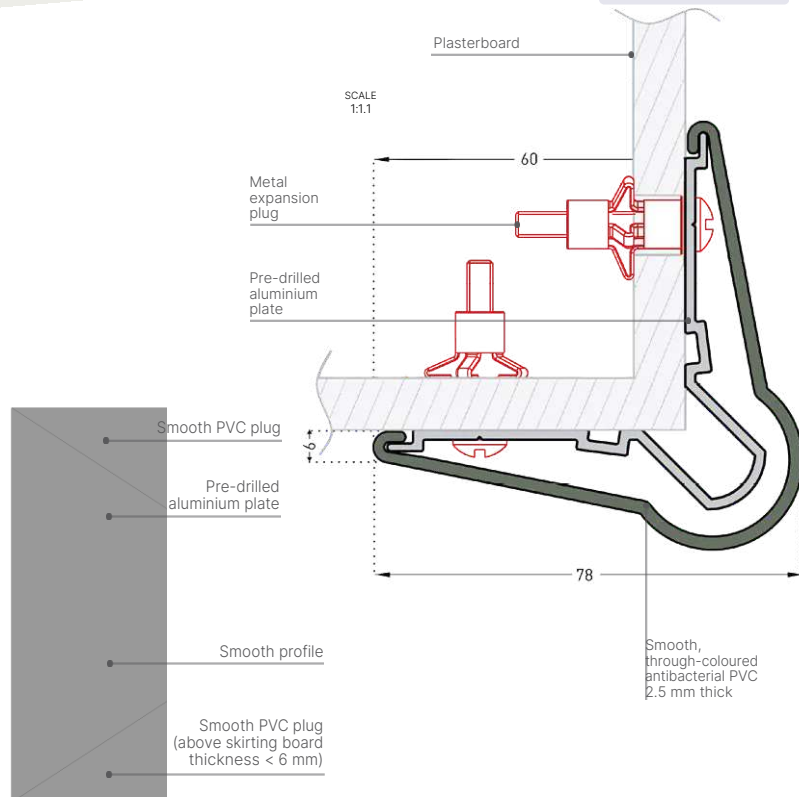

Special order colours +



*Min. quantity: 200 LM. Lead times: contact us

Spm
wall protection


CORNEAFLEX



CORNEAFLEX corner protectors provide high-performance protection for 135° or variable-angle wall corners.

They have a robust flexible edging and flexible PVC reinforcement beads.


It will not injure people and protects all corners of walls subject to heavy traffic.

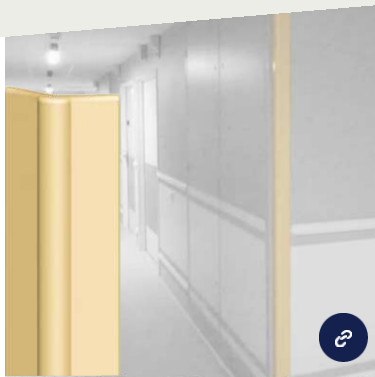

HEALTHCARE FACILITIES LABORATORIES
CENTRAL KITCHENS SCHOOLS

Height(s)	1.30 m 2.00 m 4.00 m 4.00 m	135° Variable angle
Width of wings	65 mm	
Thickness	2.5 mm flanges 3.5 mm edging	
Angular opening	135°: fixed angle 80° to 135°: variable-angle	
Material(s)	PVC Aluminium	
Hygiene	99.9% antibacterial	
Colours	5 Through-coloured	
Surface appearance	Smooth	

Standard colours



Fixing
Screwed to walls using metal expansion plugs.

Installation mode
On a 135° pre-drilled aluminium plate or in 2 parts aluminium plates to be drilled for variable angles.



SPECIFICATIONS



BIM OBJECT

Plasterboard

Metal expansion plug

- Fixed angle 135°
- Variable angle from 80° to 135°

SCALE
1:1

Smooth, through-coloured antibacterial PVC 2.5 mm thick

PVC flexible reinforcement bead

Smooth, through-coloured antibacterial PVC 3.5 mm thick

Pre-drilled aluminium plate

VARIABLE-ANGLE CORNEAFLEX

135° CORNEAFLEX

2 aluminium plates

Flexible edging with two flexible PVC reinforcement beads

Smooth PVC profile

Smooth PVC plug*

1 pre-drilled aluminium plate*

Flexible edging with two flexible PVC reinforcement beads

Smooth PVC profile

* For 135° angles only

Discover the brochures
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL





HANDRAILS

SPM handrails have been carefully designed to help people move around:

- ergonomic,
- visual guidance: many colours, integrated LED lighting,
- associated wall protection.

SPM handrails are real barriers to airborne germs, helping to effectively combat the proliferation of micro-organisms and the development of infections through high-performance materials and bactericidal joints that resist even the most demanding cleaning.



* 99.96% virucidal activity against the human coronavirus HCoV-229E after a contact time of 2 hours.



Whether antibacterial and virucidal* or made of aluminium, our systems can be adapted to any situation:

- Technical ducts;
- Curved walls;
- Angles other than 90°;
- Stairs.



CONTENTS



Tubular handrails



Wall protection handrails

LINEA'TOUCH _____ **84**

LINEA'TOUCH LED _____ **84**

ESCORT _____ **88**

STARLINE _____ **90**

PERFORMER 2 _____ **91**

ESCORT'DUO _____ **92**

LINEA'DUO _____ **92**

LINEA'DUO LED _____ **93**

GOOD TO KNOW!

All SPM handrails are fitted with bactericidal joints that are through-coloured and resistant to cleaning. Proven by an independent laboratory, this action complements the bacteriostatic and antibacterial properties of our smooth-finish handrails.



DIBBA HOSPITAL - UNITED ARAB EMIRATES
Decochoc panels / Linea'Touch LED handrail

Traffic intensity

Resistance to impacts

TUBULAR HANDRAILS

LINEA'TOUCH



VALIDATED BY
ERGONOMISTS



SPECIFICATIONS



BIM OBJECT

The LINEA'TOUCH handrail combines design, ergonomics and high impact resistance.

Its exclusive tri-lobed shape, approved by ergonomists, ensures an excellent grip while providing discreet protection for walls.

With a wide range of accessories and colours, it offers a multitude of combinations:

- Variety of solid colours;
- Wood effects with an ultra-realistic feel;
- 100% anodised version or mixed with wood decors and solid colours.

It can be curved and offers several technical solutions to ensure continuity in staircases and in front of service ducts.

INNOVATION



This handrail is available in an LED version, which now offers a user guidance system thanks to the integrated lighting.

The 3 PVC-coated, Anodised and DECOWOOD finishes are available with the LED option.

GOOD TO KNOW!



Available in a reinforced version, to ensure design continuity throughout the establishment, whatever the level of protection required.

Fixing



Mounted on a self-locking bracket, to be screwed to the wall.

Installation mode



The top of the profile is a maximum of 0.90 m above the floor.

End pieces, plugs and corner protectors should be mounted on the wall using 2.5 mm hexagon socket head tip screws.


PVC SHEATHED



BACTERICIDAL optional



ANODISED



DECOWOOD



HOSPITALS CLINICS RETIREMENT HOMES REHABILITATION CENTRES
DISABILITY CENTRES

Height(s)	42 mm
Width(s)	40 mm
Length(s)	4 m
Overall dimensions	80 mm (90 mm on request)
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial 99.96% virucidal* Bactericidal joints
Fire rating	Bs2d0
Colours	46
Surface appearance	Solid colours: smooth Wood aspect: textured finish

*See page 8: Benefits

Standard colours

Standard colours



Rapid'Angle®

Adapts to all staircase configurations with bends and slope angles (triple cardanic rotation) and all angles from 80° to 180°.

LINEA'TOUCH LED



LINEA'TOUCHLED: a backlit version with an LED strip for optimum user guidance and comfort.

Operates with a 24 VDC 60 W dimmable driver, for a maximum handrail length of 8 m.

Internal/external corner pieces fitted with an electrical junction cord for connection to the LED strips.

The power supply can be installed in a suspended ceiling or an electrical cabinet for easy maintenance.



Special order colours



*Min. quantity: 200 LM. Lead times: contact us

Discover the brochures
Access brochures by theme

HEALTHCARE

EDUCATION

HOSPITALITY


RETAIL



Spm
wall protection

LINEA'TOUCH

LINEA'TOUCH

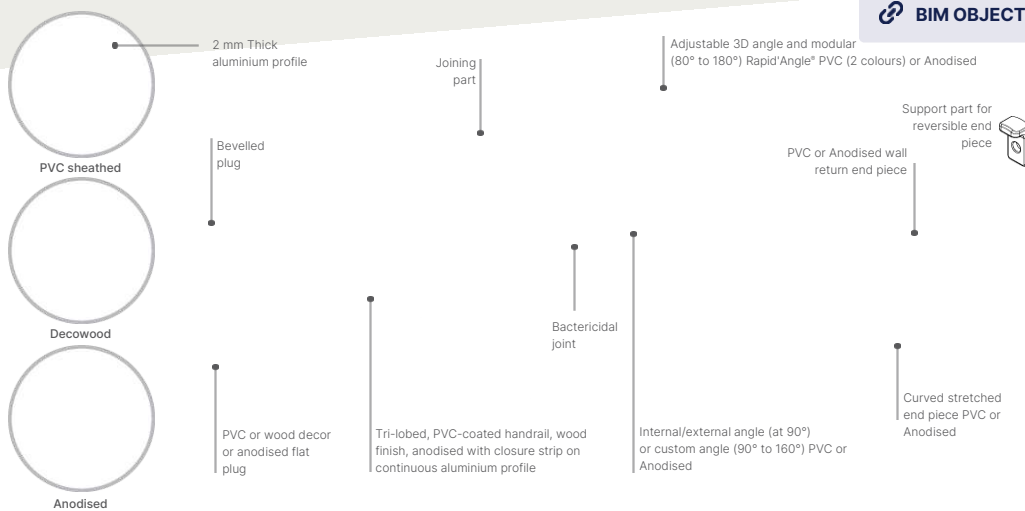

Refined 20 mm support

Self-locking in silver anodised aluminium (80 mm overall dimensions)

55 mm bugled support

Self-locking silver anodised appearance aluminium (80 mm overall dimensions)

Swan-neck support


with 70 mm self-locking rosette in brushed stainless steel (80 mm overall dimensions)

LINEA'TOUCH + ENHANCED VERSION


80 mm reinforced support

Aluminium self-locking silver anodised appearance. (overall dimensions 80 mm)

SCALE
1:1.8

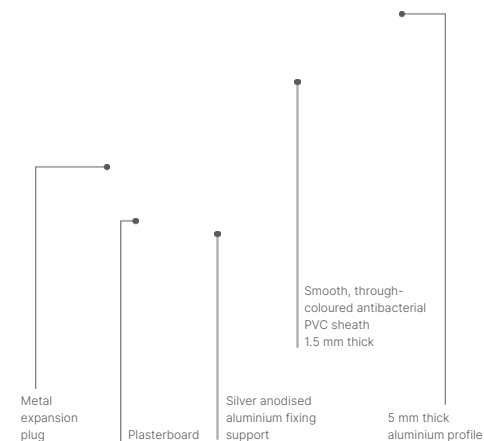

LINEA'TOUCH LED

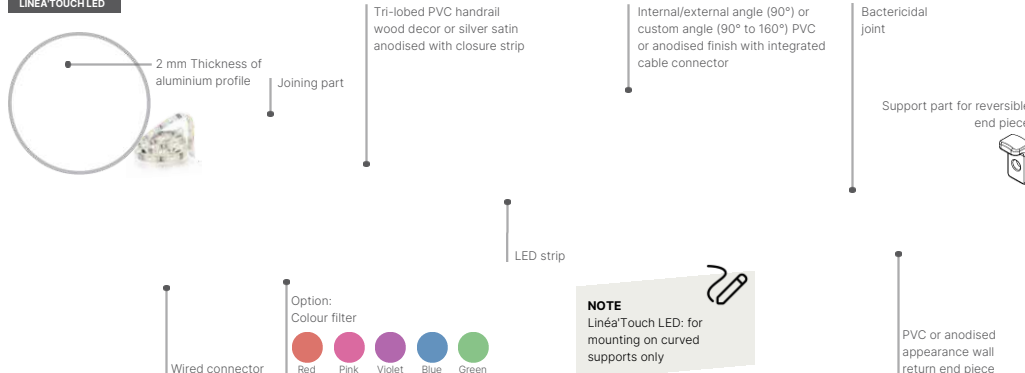


NOTE
Linea'Touch LED: for mounting on curved supports only

TUBULAR HANDRAILS
LINEA'TOUCH

SPECIFICATIONS

BIM OBJECT

20 mm refined bracketAluminium self-locking silver anodised appearance
(overall dimensions 80 mm)**55 mm bugled support (LINEA'TOUCH LED)**self-locking quick-release
in silver anodised
appearance aluminium**VIDEO**


Installing handrails

WATCH VIDEO **55 mm bugled support**Aluminium self-locking silver
anodised appearance
(overall dimensions 80 mm)SCALE
1:2.4SCALE
1:1.33SCALE
1:1.45

86

PVC sheathing, wood
decor or anodised
aluminium

LED strip

**80 mm reinforced**
self-locking aluminium bracket
silver anodised effect
(overall projection 90 mm)SCALE
1:2.4Metal
expansion
plug

Plasterboard

Silver anodised
aluminium fixing supportAluminium
profile
thickness
2 mmMetal
expansion
plug

Plasterboard

Silver anodised
aluminium
quick-release
fixing supportAluminium
profile thickness
2 mmPVC sheathing, wood decor
or anodised aluminiumDiscover the brochures
Access brochures by theme**HEALTHCARE****EDUCATION****HOSPITALITY****RETAIL**

Swan-neck support with rosette
70 mm
self-locking in brushed stainless
steel (overall dimensions 80 mm)

SCALE
1:2.4

87



ACPPA NURSING HOME - VAULX-EN-VELIN - FRANCE
Linea Touch handrail/Protecta 2 corner protector

Discover the brochures
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



TUBULAR HANDRAILS
ESCORT

SPECIFICATIONS



BIM OBJECT

The ESCORT handrail combines a good grip with sobriety and elegance.

Perfectly round and pleasant to the touch, it is very popular with people with reduced mobility.

It can be curved and offers a complete removable system to ensure the continuity of the handrail in front of service ducts.

HOSPITALS CLINICS RETIREMENT HOMES
DISABILITY CENTRES REHABILITATION CENTRE
MULTI-FAMILY HOUSING HOTELS

Length(s)	4 m
Width of handrail	Diam. 40 mm
Overall dimensions	80 mm (90 mm on request) 40 mm (wall/handrail distance)
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial 99.96% virucidal* Bactericidal joint
Fire rating	Bs2d0
Colours	46
Surface appearance	Solid colours: smooth Wood aspect: textured finish

Fixing

On self-locking brackets to be screwed to the wall every 1.20 m (0.80 m in heavily used corridors and on lighter wall brackets such as plasterboard).

Installation mode

The top of the profile is a maximum of 0.90 m above the floor. End pieces, plugs and corner protectors should be mounted on the wall using 2.5 mm hexagon socket head tip screws.

PVC SHEATHED

BACTERICIDAL optional

ANODISED**DECOWOOD****Rapid'Angle®**

Adapts to all staircase configurations with bends and slope angles (triple cardanic rotation) and all angles from 80° to 180°.

Rapid'Access®

Articulated joint, specially designed for technical ducts, with a quick-release key. (chalk colour or anodised appearance)

WATCH VIDEO


*See page 8: Benefits

Standard colours

Standard colours



Special order colours*



*Min. quantity: 200 LM. Lead times: contact us

Discover the brochures
Access brochures by theme



HEALTHCARE



EDUCATION




HOSPITALITY




RETAIL



TUBULAR HANDRAILS
ESCORT

80 mm perforated support
self-locking silver anodised appearance aluminium.
(overall dimensions 80 mm)

SCALE
1:1.6

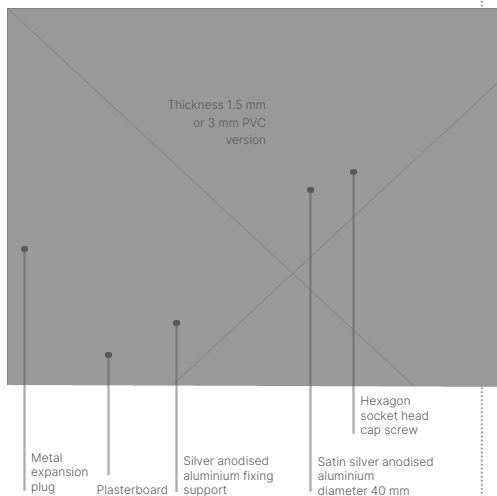


Swan-neck support
with 70 mm self-locking
rosette in brushed
stainless steel

SCALE
1:2.2





60 mm full support
self-locking in silver
anodised appearance
aluminium

SCALE
1:2.2

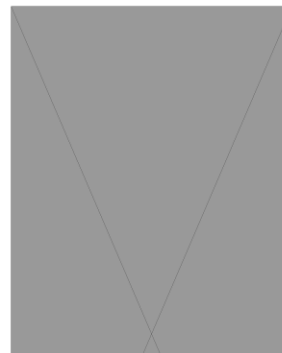

55 mm bugled support
self-locking in silver
anodised appearance
aluminium (overall projection
80 mm or 90 mm on request)

SCALE
1:2.2

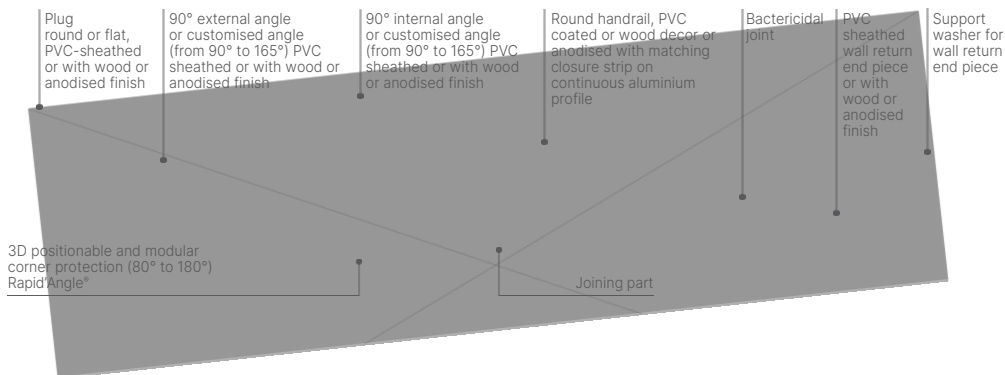

WALL PROTECTION HANDRAILS

STARLINE



SPECIFICATIONS



BIM OBJECT

The STARLINE bumper handrail combines technology and design.

This range of handrails is the ideal solution for elegantly equipping the circulation areas of all establishments open to the public.

Starline can be bent for curved wall sections and has a complete removable system to ensure the continuity of the handrail in front of service ducts.

Starline is fitted with bactericidal joints.

A choice of profiles and a multitude of strips available!

- Chalk, gravel or anodised finish aluminium profiles
- Strips: 50 colours and designs.

HOSPITALS CLINICS RETIREMENT HOMES HOTELS
DISABILITY CENTRES LOCAL AUTHORITIES OFFICES

Height(s)	90 mm
Length(s)	4 m
Overall dimensions	80 mm
Width (handrail)	30 mm
Material(s)	PVC sheathed Aluminium
Hygiene	99.9% antibacterial 99.96% virucidal* Bactericidal joint
Fire rating	Bs2d0
Colours	Profile: 3 Strip: 50

*See page 8: Benefits

Strip standard colours



Discover the brochures
Access brochures by theme

HEALTHCARE

EDUCATION

HOSPITALITY


RETAIL



STARLINE



BACTERICIDAL optional

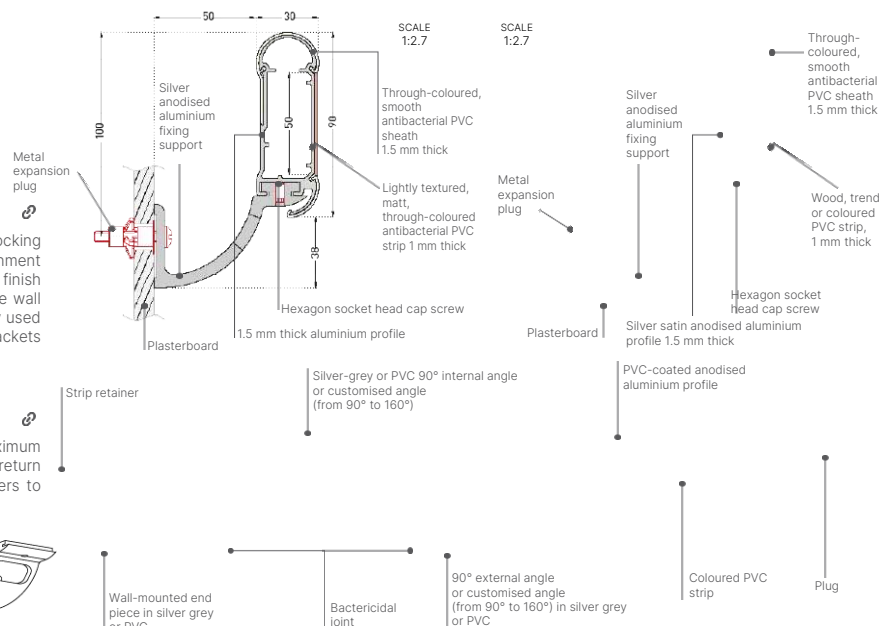

Fixing

Interlocking fitting on self-locking openwork supports at 2 attachment points in silver anodised finish aluminium to be secured to the wall every 1.20 m (0.80 m in heavily used corridors and on lighter wall brackets such as plasterboard).

Installation mode

The top of the profile is a maximum of 0.90 m above the floor. Wall return end pieces and external corners to be fixed with "pop rivets".

80 mm perforated support
self-locking silver
anodised finish aluminium



Wall-mounted end piece in silver grey or PVC

Bactericidal joint

90° external angle or customised angle (from 90° to 160°) in silver grey or PVC

Profile standard colours



Spm
wall protection

WALL PROTECTION HANDRAILS

PERFORMER 2



SPECIFICATIONS



BIM OBJECT

The PERFORMER2 bumper handrail provides excellent grip and wall protection in highly exposed traffic areas. Performer 2 is fitted with bactericidal joints.

Quick and easy to install.



HOSPITALS CLINICS RETIREMENT HOMES
DISABILITY CENTRES

Height(s)	140 mm
Length(s)	4 m
Overall dimensions	Minimum: 105 mm
Width(s) of handrail	50 mm Handrail section: ϕ 40 mm
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial 99.96% virucidal* Bactericidal joint
Fire rating	Bs2d0
Colours	5 Through-coloured
Surface appearance	Handrail: smooth Wall protection rail: smooth with a few decorative grooves


Fixing

Interlocking fitting on PVC support to be screwed to the wall every 1.20 m (0.80 m in heavily used corridors and on lighter wall brackets such as plasterboard).

Installation mode

The top of the profile is a maximum of 0.90 m above the floor. Wall return end pieces and external corners to be fixed with "pop rivets".


Fixing support with clamping screw

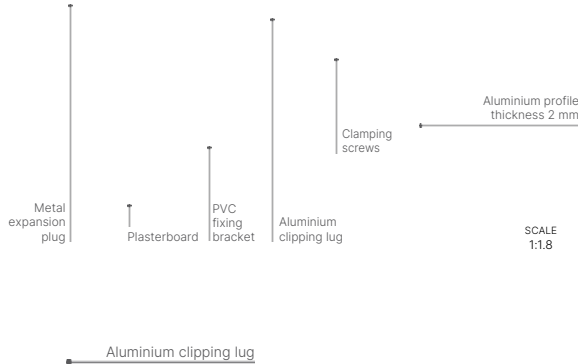

SCALE
1:1.8

*See page 8: Benefits

Standard colours



Wall return end piece / 90° external angle

Bactericidal joint

Discover the brochures
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



WALL PROTECTION HANDRAILS

ESCORT'DUO & LINEA'DUO



ESCORT'DUO



DESCRIPTIF TYPE

LINEA'DUO



DESCRIPTIF TYPE

BIM OBJECT

The ESCORT'DUO and LINEA'DUO wall protection rails have been designed to provide the dual function of wall protection/handrail in rolling stock aisles that are subject to heavy impact loads.

They offer a range of options:

- Choose the shape of the top of the handrail:
 - Round with ESCORT'DUO or
 - Tri-lobed with LINEA'DUO.
- Choose option
 - Single colour
 - Two-tone to differentiate the handrail from the wall protection rail.

GOOD TO KNOW!

LINEA'DUO comes in an LED version, compatible with a presence detector, a switch and a programmer.

HOSPITALS CLINICS RETIREMENT HOMES DISABILITY CENTRES

Height(s)	150 mm
Length(s)	4 m
Overall dimensions	95 mm 50 mm (wall/handrail distance)
Width(s)	50 mm
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial 99.96% virucidal* Bactericidal joint
Fire rating	Bs2d0
Colours	Two tones possible Handrail: 39 colours Wall protection rails: 3 colours Through-coloured
Surface appearance	Handrail section: smooth Wall protection rail section: matt finish

Fixing

On PVC support to be screwed to the wall every 0.80 m (0.60 m in heavily used corridors and on lighter wall brackets such as plasterboard).

Installation mode

The top of the profile is a maximum of 0.90 m above the floor. Wall return end pieces and corners should be mounted on the wall using self-drilling screws.

ESCORT'DUO



BACTERICIDAL optional

LINEA'DUO & LINEA'DUO LED



BACTERICIDAL optional

Linea'Duo LED



LINEA'DUO LED: a backlit version with an LED strip for optimum user guidance and comfort.

Operates with a 24 VDC 60 W dimmable driver, for a maximum handrail length of 8 m.

Internal/external corner pieces fitted with an electrical junction cord for connection to the LED strips.


The power supply can be installed in a suspended ceiling or an electrical cabinet for easy maintenance.

GOOD TO KNOW!

LED handrail installation guide available on request. Consult us.

*See page 8: Benefits


Standard handrail colours +



Standard wall protection rail colours



Special order colours* +



*Min. quantity: 200 LM. Lead times: contact us

Discover the brochures
Access brochures by theme

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL

+

Spm
wall protection

SUPPORT & SECTIONS


ESCORT'DUO, LINEA'DUO & LINEA'DUO LED




ESCORT'DUO

LINEA'DUO



LINEA'DUO LED

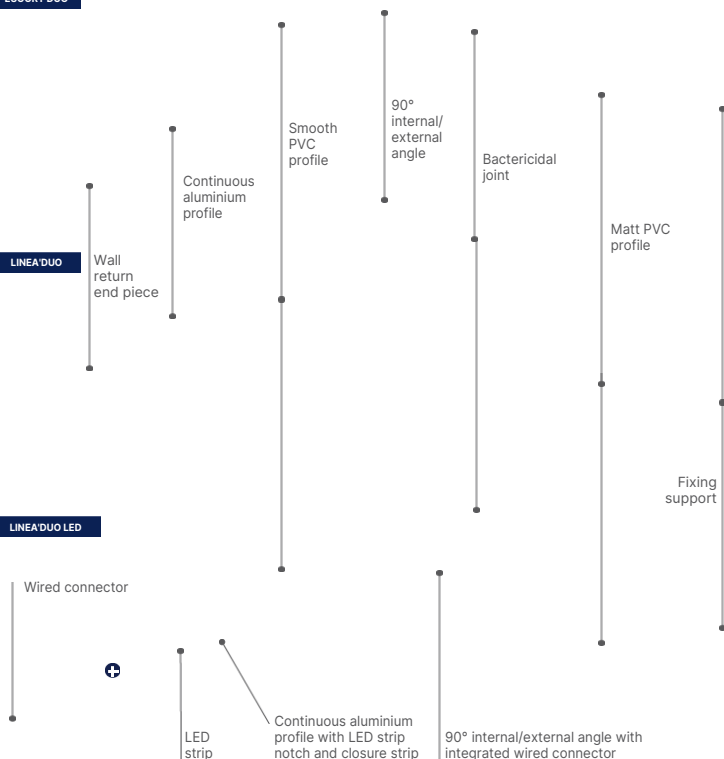


ESCORT'DUO

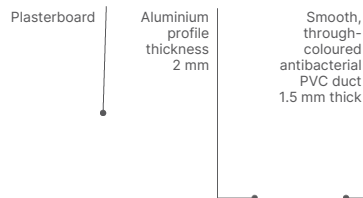SCALE
1:2.3

LINEA'DUO

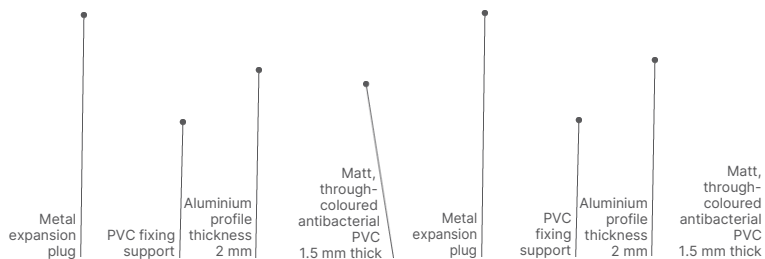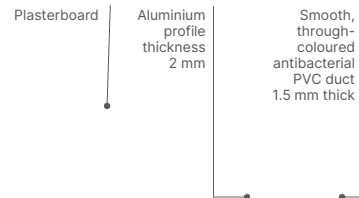SCALE
1:2.3

LINEA'DUO LED



Discover the brochures
Access brochures by theme



TECHNICAL SOLUTIONS FOR HANDRAILS

PASSAGE IN FRONT OF SERVICE DUCTS

APPLICATIONS

A quick-release system (keys) designed to facilitate access to service duct doors while ensuring the continuity of handrails and the safe accompaniment of people.

Available for Escort, Linea'Touch and Starline handrails.

SERVICE DUCTS WIDER THAN 1100 MM



A quick-release bracket should be fitted to the service duct door.

STARLINE HANDRAIL

For the Starline handrail, SPM can supply a ready-to-install kit (section up to 1100 mm; other dimensions on request).

ESCORT AND LINEA'TOUCH HANDRAILS

For Escort and Linea'Touch handrails, the technical duct kit is made on site: cutting the profile to match the size of the technical duct door with two 45° cuts and two quick-release keys.

For the Escort handrail: Rapid'Access®, articulated joint, specially designed for technical ducts, with a quick-release key. (chalk colour or anodised appearance)

PATENTED

Bactericidal joint

45° cut

Support
Rapid'Access®

Quick-release key

Starline profile section (up to 1100 mm)
specially machined for technical ducts
(other dimensions on request)


BENDING

APPLICATIONS

Bending of Starline, Escort and Linea'Touch handrails to adapt to different building configurations.

CONVEX
bending

CONCAVE
bending

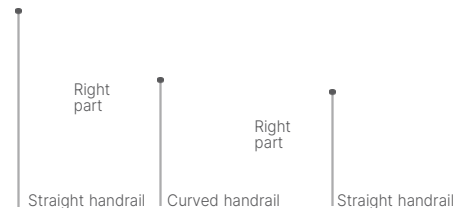

TECHNICAL SOLUTIONS FOR HANDRAILS

RAPID'ANGLE® FOR STAIRS AND ANGLES FROM 80° TO 180°


APPLICATIONS

SPM has developed Rapid'Angle® for the Escort round handrail and the Linea'Touch tri-lobed handrail, which adapts to:

- all staircase configurations with bends and slope angles (triple cardanic rotation)
- all angles from 80° to 180°.

PATENTED


**RAPID'ANGLE®
ESCORT**
also available for
Linea'Touch handrail.



ANTI-LIGATURE BRACKET

APPLICATIONS


To deal with the potential risk of hanging in certain establishments (prisons, disability-adapted centres, etc.), SPM has engineered this anti-ligature bracket to ensure the safety of users. 500 mm long, they can be fitted continuously under the entire length of the Escort or Starline handrails.

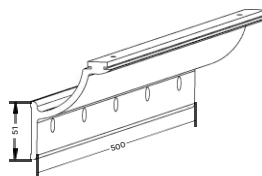

ESCORT TACTILE MARK

APPLICATIONS


The unique tactile locating key to be fitted under the Escort handrail helps visually impaired people find their way around. Multiplied, it indicates the level you are on.

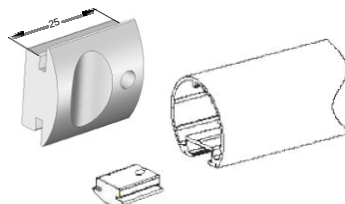



DOUBLE-HEIGHT SUPPORT SPECIALLY FOR "ACCESSIBILITY": ESCORT

APPLICATIONS

This double-height support makes it easy to install two levels of Escort handrails: one at standard height, and one for children and/or wheelchair users. The level of the lower handrail has been specially designed to help these people move around comfortably. This accessory makes installation easier, as only one horizontal mark is required for the two levels of handrails.






HOSPITALS CLINICS - RETIREMENT HOMES DISABILITY CENTRES

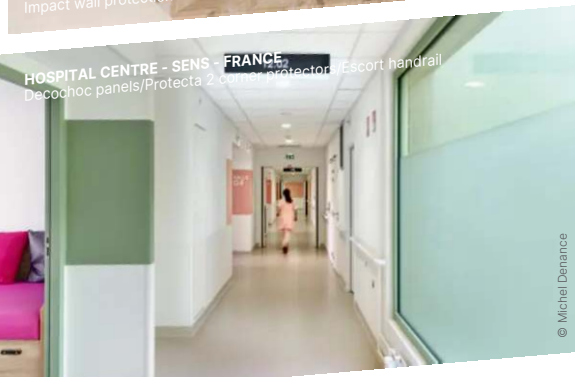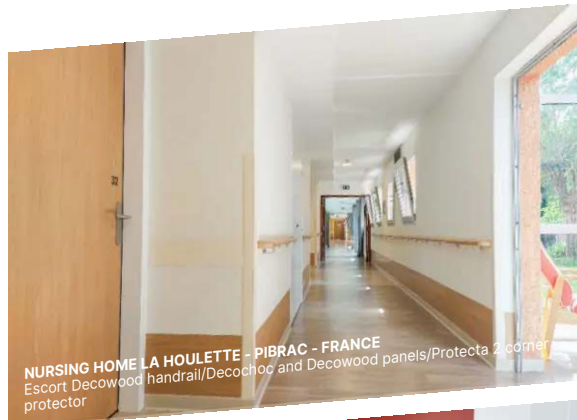








EARLY CHILDHOOD - EDUCATION

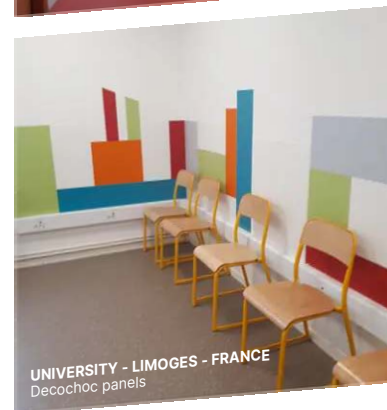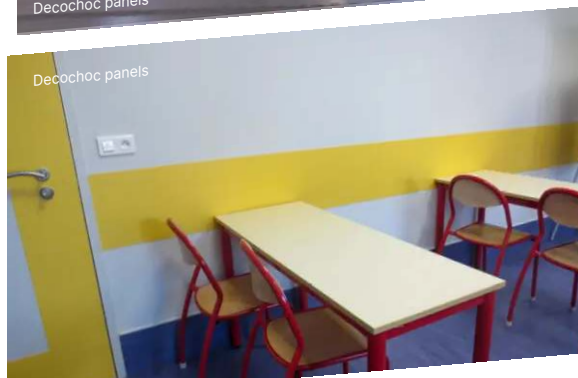

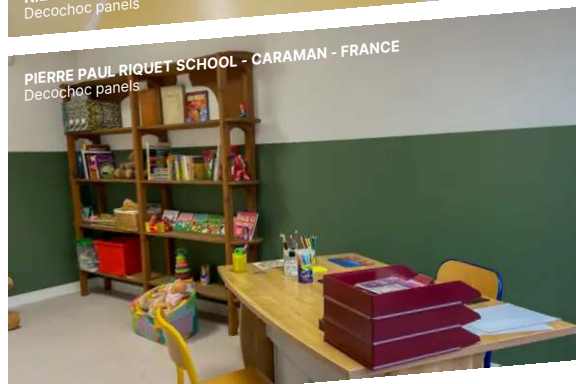



SPORT FITNESS - OFFICES MULTI-FAMILY BUILDINGS

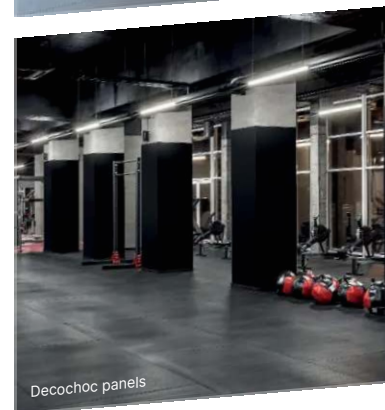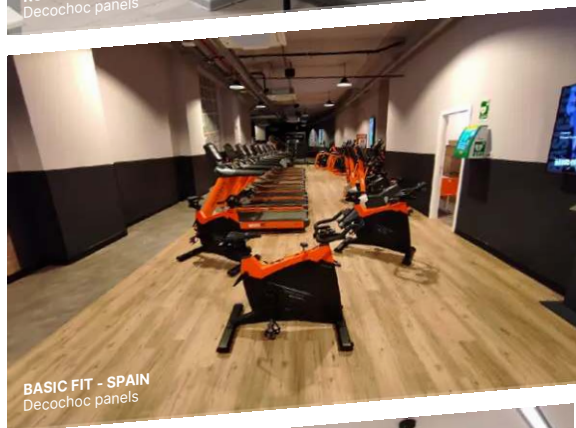

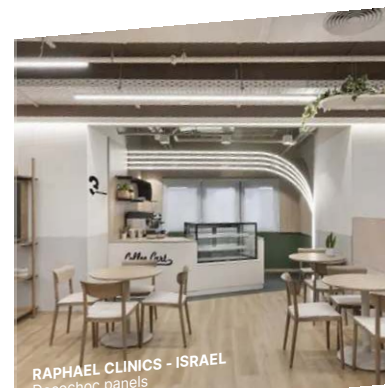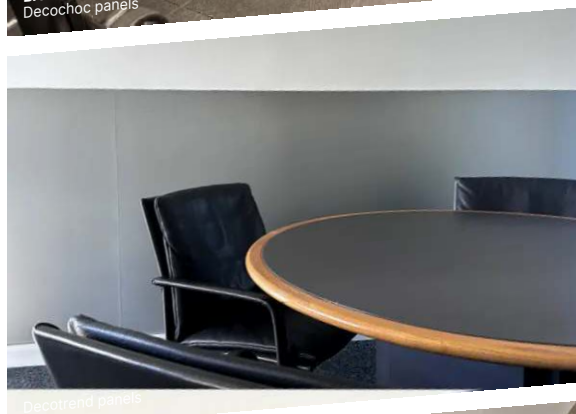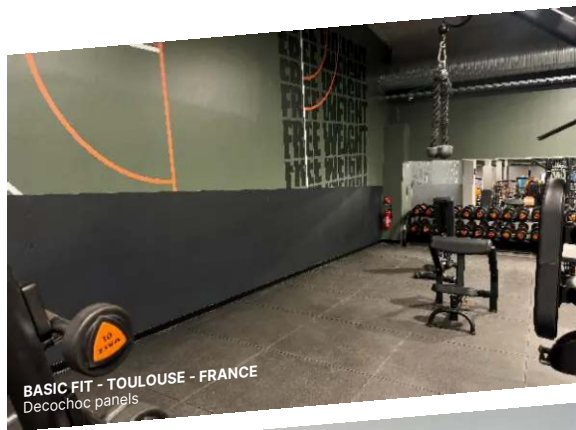




HOUSING

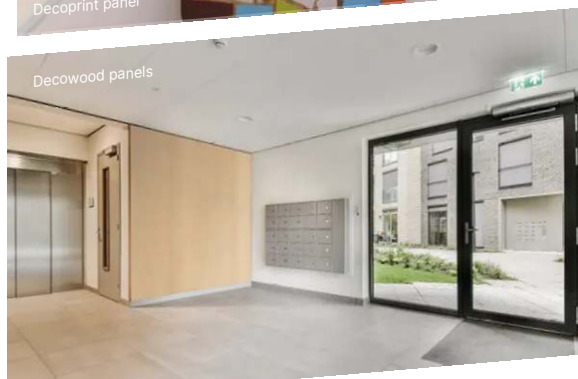



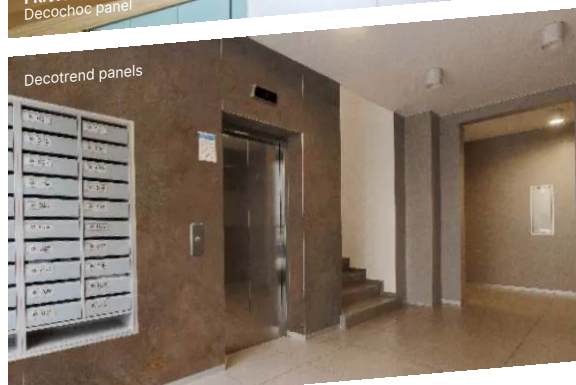


HOTELS - RESTAURANTS

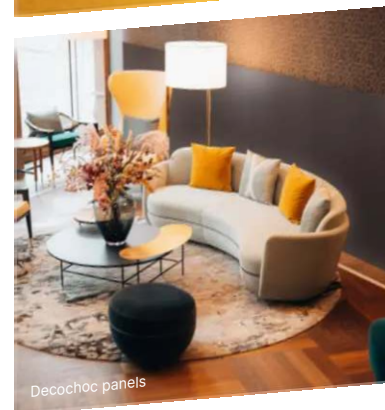

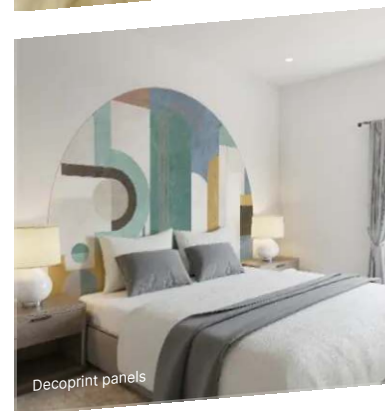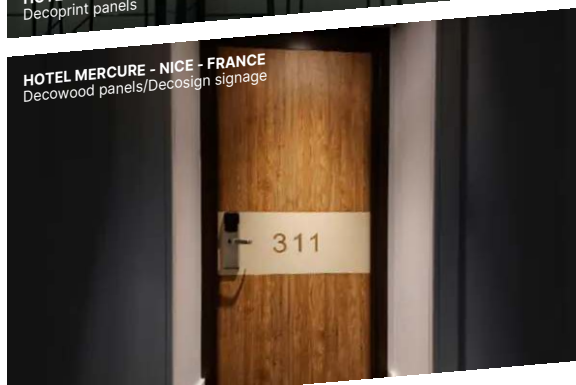

SHOPS

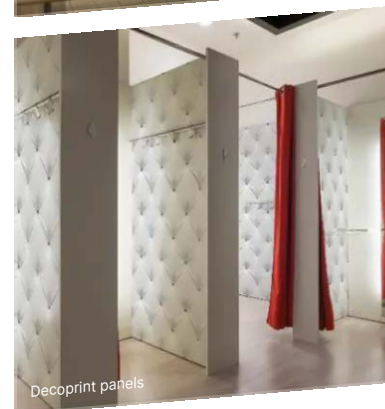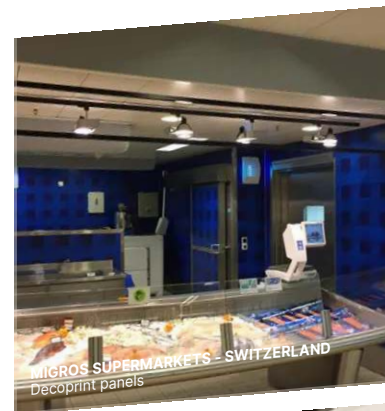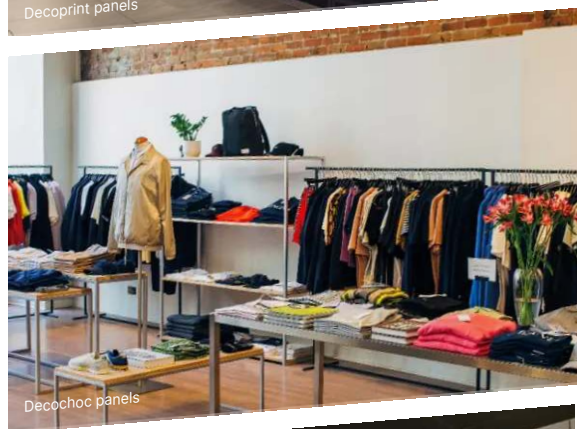



INDUSTRY



OUT OF THE ORDINARY



110

[illegible]

111

● In stock (while stocks last) ○ To order (consult us)

Export department

Tel: + 33 (0)5 34 39 41 00

Email: export@spm.fr

SPM International S.A.S.

16 rue Isabelle Eberhardt

CS 92083 - 31019 Toulouse Cedex 2

France

spm-international.com

Follow us



PANELS
HANDRAILS
WALLPROTECTIONRAILS
CORNERROTECTORS
SIGNAGE



ECODESIGN



REDUCED CARBON
FOOTPRINT



SUSTAINABLE
BUILDING

A company of **Gerflor**

Spm[®]
wall protection